

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

Distec

IF442

USB Audio Modul

USB Audio Modul 2xSpeaker

ZU-02-510

ZU-02-517



Version 1.1

26.04.2023

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

Table of Contents

1	Revision History	4
2	Overview	5
3	General Features	5
4	Accessories	5
5	Hardware Features	6
5.1	Absolute Maximum Ratings	6
5.2	Environmental Conditions	6
5.3	Electrical Characteristics.....	7
6	Mechanical Specification.....	8
7	Connector Overview.....	9
7.1	X1 USB 2.0 Connector.....	10
7.2	X2 I2C Connector	10
7.3	X4 I2C Connector	10
7.4	X4 Microphone 1 Input.....	10
7.5	X5 Microphone 2 Input.....	11
7.6	X6 Supply Voltage 12-24V.....	11
7.7	X7 Speaker Output 1	11
7.8	X8 Speaker Output 2	11
8	Volume Control	12
8.1	Jumper settings JP1/JP2	12
9	Hardware Information.....	12

1 Revision History

Date	Rev.No.	Description	Page
22.3.2021	1.0	Initial version	All
26.04.2023	1.1	Picture changed. SAP numbers and product names added. KA-31-342 added. Current consumption changed to 70mA. Drawing of connector positions added. I2C description and jumper settings added	1,5 2,12 5 7 9 5,

2 Overview

This document describes the requirements and technical data of IF 442 USB Audio Module.

3 General Features

USB-Audio Modul IF 442 is a device to drive standard speaker (8Ohm) with a nominal output power of 3W. IF 442 is equipped with an USB interface (compliant with USB 2.0 specification)

The USB-controller requires no software protocol.

Additionally, IF 442 is equipped with 2 microphone inputs.

The microphone inputs are optimized for use with IF 443-00 MIC_PCB (ZU-02-511).

The USB controller and the microphone driver are supplied via USB port. (+5V DC)

The output stage to drive the speaker is supplied with DC (+12V~+24V) externally.


Optional usage of I2C Bus to control Volume (activate with jumper)

Optional usage of both speaker outputs/one speaker output according hardware version:

- **USB Audio Modul** (ZU-02-510; IF442-00) only provides one speaker output (X7).
- **USB Audio Modul 2xSpeaker** (ZU-02-517; IF442-01) provides two speaker outputs (X7 and X8)

4 Accessories

Part Number	Description	Comment
ZU-02-511	IF443-00 MIC_PCB/ (additional Board equipped with microphone)	1 pc required for each input
KA-31-342	Cable IF443/IF442 200MM	1 pc required for each input

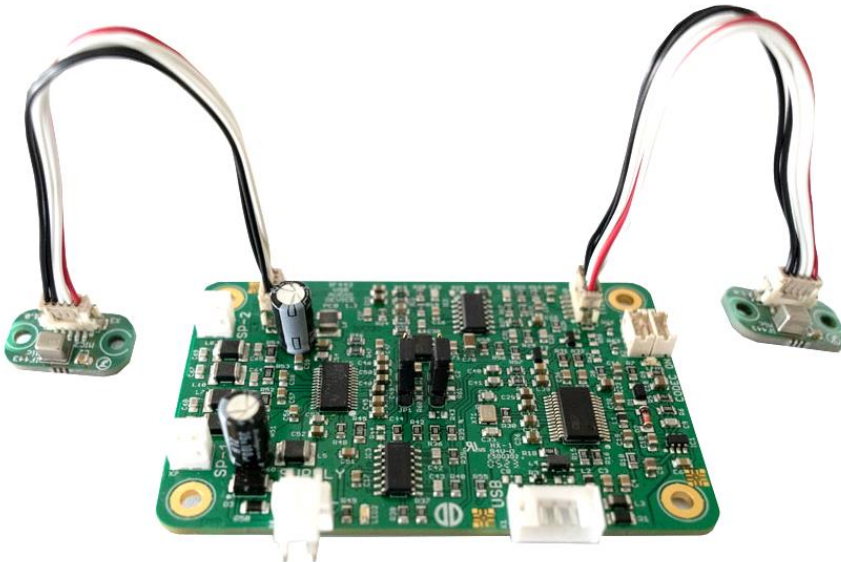

View of IF442 equipped with 2x IF 443-00

5 Hardware Features

5.1 Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Note
Supply Voltage	V _{IN}	-0.3	+30	VDC	
USB Voltage	V _{BUS}	-0.3	+6.5	VDC	

5.2 Environmental Conditions

DESCRIPTION	Signal	Min.	Max.	Unit	Note
Operating Temperature	T _{OP}	-20	+85	°C	
Storage Temperature	T _{ST}	-40	+85	°C	
Relative humidity	R _H	-	90	%	

5.3 Electrical Characteristics

All measurements done:

- 25°C ambient temperature
- 1 kHz Input signal
- 8Ohm speaker
- (unless otherwise stated)

DESCRIPTION	Condition	MIN.	TYP.	MAX.	Unit	Note
Supply Voltage		8	24	26	VDC	
Current Consumption $V_{in}=24V$	No Input signal	-	56	-	mA	
	Input signal/ Output:2x3W@8Ohm	-	210	-	mA	
Current Consumption $V_{in}=12V$	No Input signal	-	32	-	mA	
	Input signal/ Output:2x3W@8Ohm	-	340	-	mA	
Current Consumption $V_{BUS}=5V$		-	-	70	mA	
Supply Voltage for MEMS Microphone		2.7	2.8	2.9	V	
Input Level Microphone		-	-	-6 ~388	dBu mV RMS	1
Total harmonic distortion plus noise THD+N (micro-Input)				0.006	%	1
Noise Level (micro-Input)	unrated	-	-	-88	dBFS	1
	A-rated	-	-	-90	dBFS	1
Crosstalk (micro-Input)		-	-	-85	db	1
Frequency response (micro-Input)	-3dB	80Hz...15kHz			-	1
Output Power	Input level: -3.6dBFS 1% THD+N	-	5.3	-	W	2
	Input level: -6dBFS 0.1% THD+N	-	3	-	W	2
	Input level: -10.5dBFS 0.1% THD+N	-	1	-	W	2
Noise Level (output stage)	unrated	-	-	-85	dBr	
	A-rated	-	-	-88	dBr	
Crosstalk (output stage)		-	-	-64	dB	
Frequency response (output stage))	-3dB	60Hz...>20kHz			-	

- 1) In combination with IF 443-00 as microphone device.
- 2) For each output channel

6 Mechanical Specification


The total PCB size: B52 x L80 x H1.6 mm

Max component high on the top side: 12.0mm

Max component high on the bottom side: 2.5mm

The product- and serial-number labels are assembled to the bottom side.

Weight: 22g.

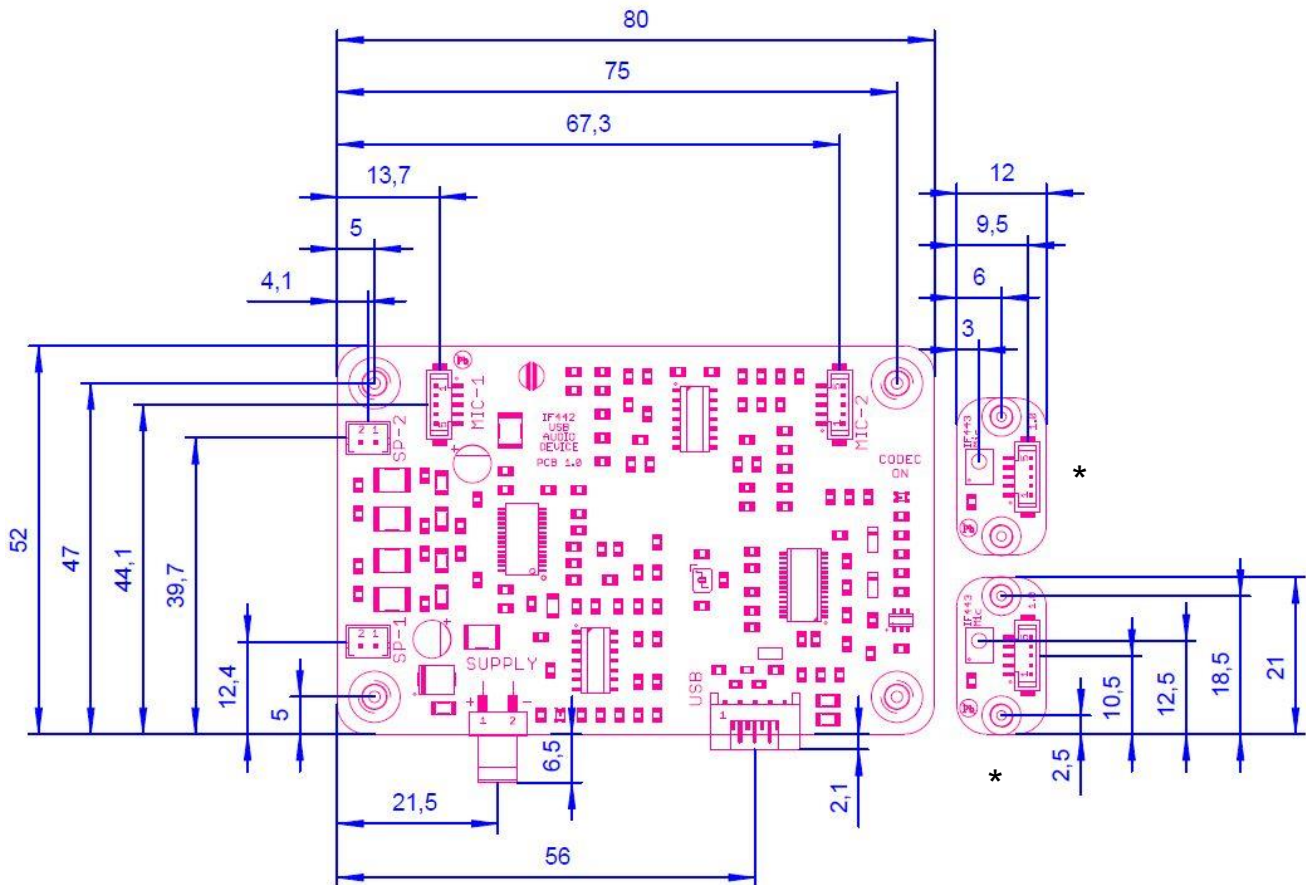


*Drawing includes 2x ZU-02-511(IF433).

7 Connector Overview

Connector	DESCRIPTION	TYPE	MANUFACTURER	Note
X1	USB 2.0 Connector	S5B-PH-K-S	JST	
X2	I2C connector	DF13-4P-1.25V	Hirose	1
X3	I2C connector	DF13-4P-1.25V	Hirose	1
X4	Microphone 1 Input	DF13-5P-1.25V	Hirose	
X5	Microphone 2 Input	DF13-5P-1.25V	Hirose	
X6	Supply Voltage 12-24V	B2PS-VH	JST	
X7	Speaker Output 1	B2B-PH-K-S	JST	
X8	Speaker Output 2	B2B-PH-K-S	JST	2

- 1) Connectors X2 and X3 are connected in parallel. Second connector can be used to connect one more I2C component on I2C Bus
- 2) N.A. on ZU-02-510.

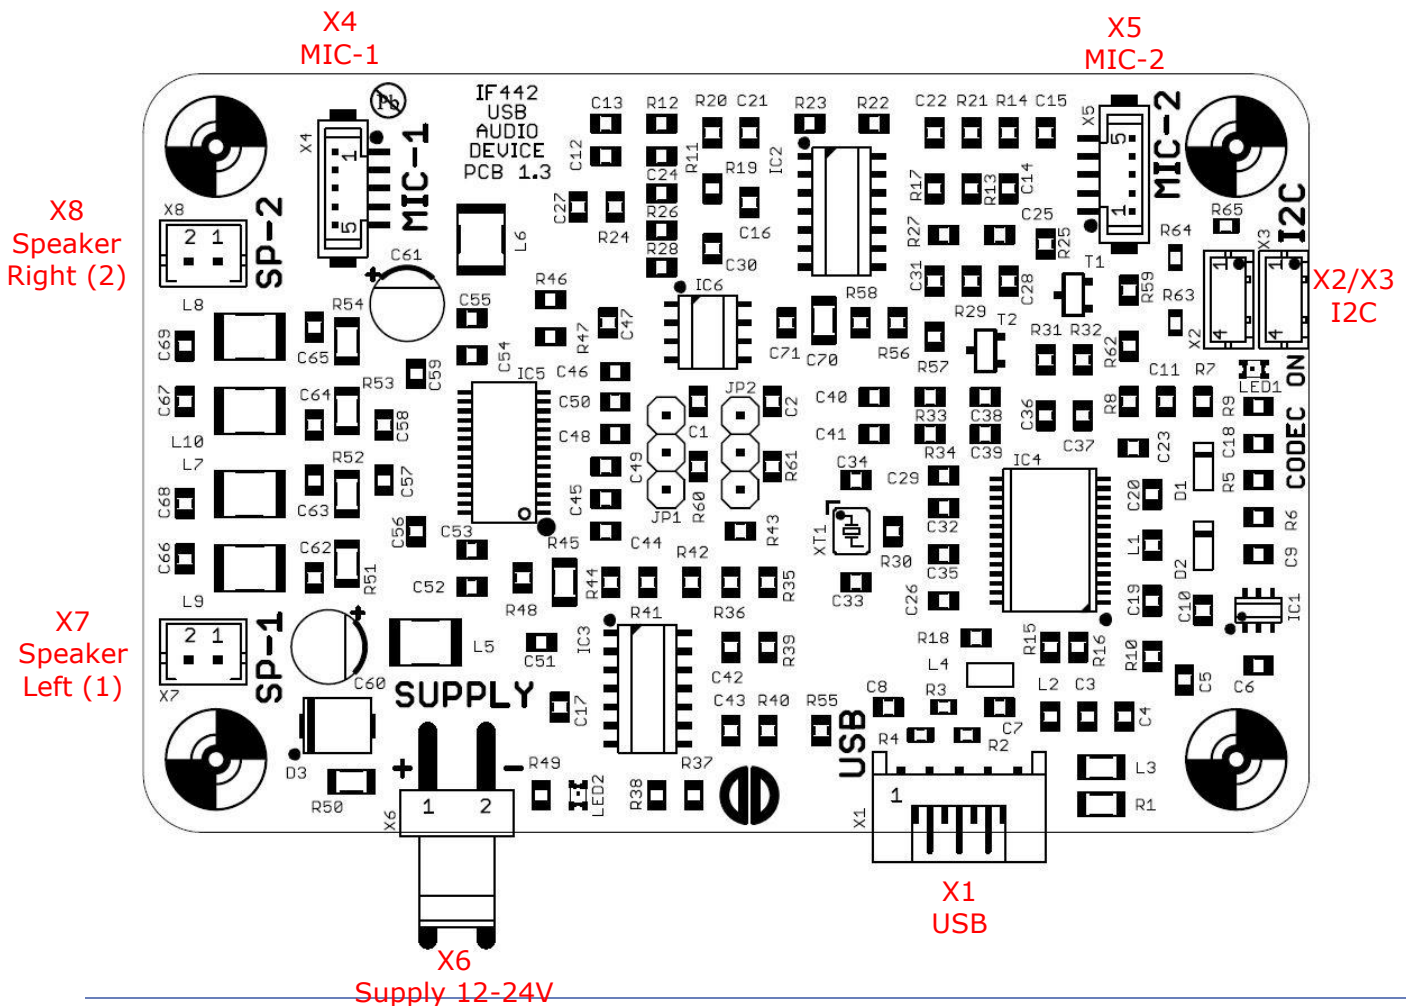

7.1 X1 USB 2.0 Connector

USB 2.0 Connector		
Pin	Signal	Description
1	+5V	VBUS Input
2	D-	USB Data - Line
3	D+	USB Data + Line
4	GND	Ground
5	Shield	Shielding USB Cable

7.2 X2 I2C Connector

I2C connector		
Pin	Signal	Description
1	GND	Ground
2	3V3	+3.3V
3	SDA	Data I2C
4	SCL	Clock I2C

7.3 X4 I2C Connector

I2C connector		
Pin	Signal	Description
1	GND	Ground
2	3V3	+3.3V
3	SDA	Data I2C
4	SCL	Clock I2C

7.4 X4 Microphone 1 Input

Microphone 1 Input		
Pin	Signal	Description
1	MIC_SUPPLY	Supply Voltage for Microphone 3.8V
2	MIC IN+	Microphone Input +
3	MIC IN-	Microphone Input -
4	GND	Ground
5	GND	Ground

7.5 X5 Microphone 2 Input

Microphone 2 Input		
Pin	Signal	Description
1	MIC_SUPPLY	Supply Voltage for Microphone 3.8V
2	MIC IN+	Microphone Input +
3	MIC IN-	Microphone Input -
4	GND	Ground
5	GND	Ground

7.6 X6 Supply Voltage 12-24V

Supply Voltage 12-24V		
Pin	Signal	Description
1	V _{in}	Supply Voltage for Audio output stage
2	GND	Ground

7.7 X7 Speaker Output 1

Speaker Output 1		
Pin	Signal	Description
1	OUTPL	Speaker Output L+
2	OUTNL	Speaker Output L-

7.8 X8 Speaker Output 2

Speaker Output 2		
Pin	Signal	Description
1	OUTPR	Speaker Output R+
2	OUTNR	Speaker Output R-


8 Volume Control

The output volume can be controlled via I2C.


For details (I2C address, Code sequence) please refer to datasheet of following IC:

PT2259-S (Princeton technology Corp.)

8.1 Jumper settings JP1/JP2

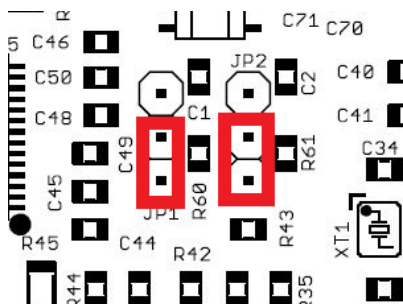

Jumper Setting I2C control not used (PT2259S is bypassed)

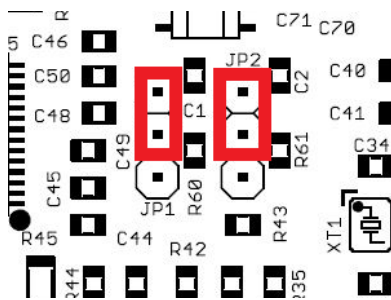

Jumper setting I2C control is active (PT2259S is active)

9 Hardware Information

Part Number	Description	Comment	Status
ZU-02-510	USB-Audio Modul IF 442-00	X8 deactivated	Inactive (1)
ZU-02-517	USB-Audio Modul 2x speaker IF 442-01	fully assembled board	active
ZU-02-511	IF443-00 MIC_PCB	microphone board (optional accessory)	active

1) Please contact Distec Customer Service if this hardware-version (1 speaker output) is needed.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecaq.de
Internet: www.fortecaq.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com