



DATA DISPLAY GROUP


Datasheet

DMC Co., Ltd

DUS3000

TO-02-088

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

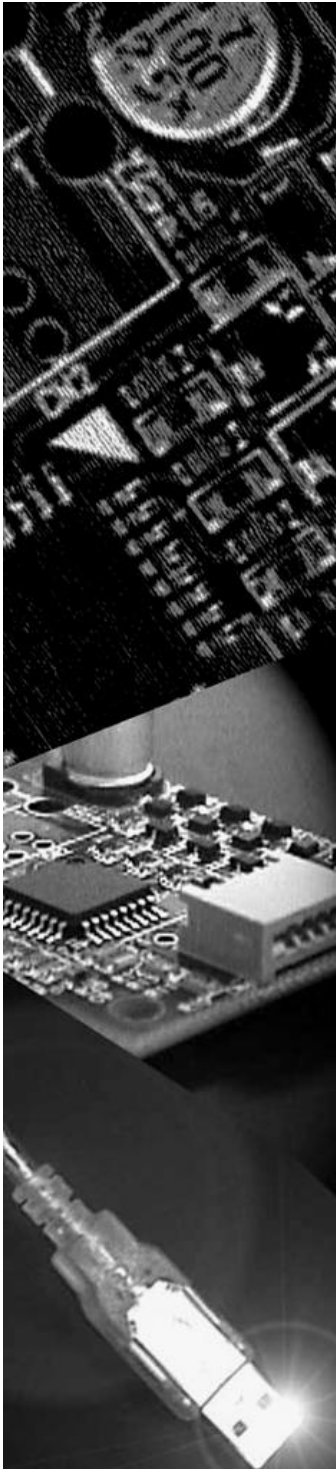

DMC Co., Ltd.

**Controller Board for Projected Capacitive Touch Screen
DUS3000 Product Specification**

Table of Contents

1. Applicable Product	2
2. Product Specification	2
2-1. Touch Screen Board Specification.....	2
2-2. Host Interface.....	3
2-3. Electrical Specification.....	3
2-3-1. Maximum Absolute Rating.....	3
2-3-2. DC Characteristics.....	3
2-4. Connector Pin Assignment.....	5
2-4-1. Connector Information.....	5
2-4-2. Connector Terminal.....	5
3. Precautions	6
4. Change History	6
5. Warranty	7
5-1. Warranty Period.....	7
5-2. Warranty Target.....	7
5-3. Warranty Exceptions.....	7
6. Precautions for Use	8
6-1. General Handling.....	8
6-2. Others.....	8

Outline Dimensional Drawing

1. Applicable Product

This specification sheet is applied to DUS3000 touch screen controller board.

2. Product Specification

2-1. Touch Screen Board Specification

Item		Spec	Remark
Touch Detection Principle		Projected Capacitive	
Host Interface		USB Full Speed UART	
Input Power-supply Voltage		5[V]±5[%]	
Operating Temp		-20 [°C] to 85 [°C]	No dew condensation
Storing Temp		-40 [°C] to 85 [°C]	No dew condensation
Main IC		MCU 1 [pcs]	
		Sensor IC 3 [pcs]	
Number of Electrodes	Electrode (X)	78	
	Electrode (Y)	52	
Coordinate Performance	Maximum Coordinate Number to Output	2 [Finger]	
	Report rate (1 finger)	100 [Hz]	*2
	Report rate (2 fingers)	100 [Hz]	*2
	Report rate (2 fingers at same axis)	100 [Hz]	*2
	Electrode resolution	256 [1/Electrode]	
	2 fingers minimum distance (X)	3.5 [Electrode]	18[mm]@6[mm]◇
	2 fingers minimum distance (Y)	3.5 [Electrode]	18[mm]@6[mm]◇
	Coordinate Accuracy (1 finger: high accuracy area)	max ±0.25 [Electrode]	≒ 1.5[mm]@6[mm]◇*1
	Coordinate Accuracy (2 fingers: high accuracy area)	max ±0.50 [Electrode]	≒ 3.0[mm]@6[mm]◇*1
	Coordinate Accuracy (1 finger: low accuracy area)	max ±0.75 [Electrode]	≒ 4.5[mm]@6[mm]◇*1
	Coordinate Accuracy (2 fingers: low accuracy area)	max ±1.00 [Electrode]	≒ 6.0[mm]@6[mm]◇*1
	Low accuracy area	3 [Electrode]	Specify area from the edge
Low Power Mode		Active / Suspend	
Calibration	Calibration function	Support	
	Calibration Time	TYP 5 [sec]	

*1 The indicated coordinate accuracies are performances under a noise-free environment. The accuracy may significantly drop due to extrinsic noises.

*2 Report rate depends on CR values of the sensor glass. This specification is of the operation by 250KHz clock scan.

2-2. Host Interface

USB Interface

Item	Value	Note
Host Interface	USB 2.0 Full speed 12[Mbps]	
Power supply	Bus-powered	
Power type	Low power device	Under 100mA
VendorID/ProductID	0x0AFA / 0x07D0, 0x0AFA / 0x07D2	
Power save mode	USB Suspend mode (compliant to USB specification)	

Serial Interface

Item	Value	Note
Host Interface	UART Baud Rate 57.6[Kbps]	
Data bits	8	
Stop bit	1	
Parity check	None	

2-3. Electrical Specification

2-3-1. Maximum Absolute Rating

Item	Specifications			Unit	Note
	Min.	Typ.	Max.		
Touch Panel Power Supply	-0.3		6	V	

2-3-2. DC Characteristics

Board Consumption Current

Test Condition : TA = 25°C, VCC = 5V

Item	Specifications			Unit	Note
	Min.	Typ.	Max.		
Touch Panel Power Supply	4.75	5	5.25	V	
Normal operation mode		60		mA	
Suspend mode		500		uA	

IO Signal (TX, RX, RESET) DC Characteristics

Parameter	Specifications			Unit	Note
	Min.	Typ.	Max.		
Input High Voltage	2.2		VDD +0.2	V	VDD=5.5V
Input Low Voltage	-0.3		1.0	V	VDD=4.5V
Output High Voltage	2.7		-	V	VDD=4.5V
Output Low Voltage	-		0.4	V	VDD=5.5V

USB Signal (D+, D-) DC Characteristics

Parameter	Specifications			Unit	Note
	Min.	Typ.	Max.		
Input High Voltage	2.0		-	V	
Input Low Voltage	-		0.8	V	
Output High Voltage	2.8		3.6	V	
Output Low Voltage	0		0.3	V	

2-4. Connector Pin Assignment

2-4-1. Connector Information

Connector Number	Model Number	Maker
CN1	FH28H-80S-0.5SH	HIROSE
CN2	FH28D-55S-0.5SH	HIROSE
CN3	SM06B-SRSS	JST
CN5	SM11B-SRSS	JST

2-4-2. Connector Terminal

Connector Number	Terminal Number	Terminal Name	Description
CN1			Connector for touch sensor, 80 pins
CN2			Connector for touch sensor, 55 pins
CN3	1	Vbus	USB power input
	2	D-	USB D-
	3	D+	USB D+
	4	GND	USB GND
	5	RESET	Reset Terminal
	6	GND	Reset GND
CN5	1	ICE_CK	Unused
	2	ICE_DAT	Unused
	3	RSTn	Reset Signal
	4	Tx	UART Communication (5VTTL Level)
	5	Rx	UART Communication (5VTTL Level)
	6	SCL	Unused
	7	SDA	Unused
	8	GPIO1	Unused
	9	Vcc_IN	DC Power Input
	10	ICE_Vcc	Unused
	11	GND	Power Ground

3. Precautions

Operation may become unstable, depending on the surrounding environment.

Do not use the controller under environments that affect capacitance values (The affecting factors are such as power-supply noises).

4. Change History

Ver0.1 (May 29, 2012)

Provisional product specification was issued.

Ver0.2 (June 6, 2012)

2-2. (For reference) was deleted from the description of host interface and serial interface.

2-3-2. Specification of DC characteristics, DC specification of IO signal and USB signal were added.

2-4. Positional dimension of connector was added on DUS3000 Outline Dimensional Drawing.

2-5-2. Descriptions for CN5 of connector terminal were added.

Ver0.3 (June 29, 2012)

2-1. Touch Screen Board Specification Main IC : Changed a description.

2-5-1. Connector Information : (No Mount) is added.

Ver1.0 (October 1, 2012)

First Release

Changes from the Ver0.3 are as follow.

2-1. Touch Screen Board Specification....Interface UART was added.

2-1. Touch Screen Board Specification....Operating / Storing Temp was added.

2-1. Touch Screen Board Specification....Calibration Time Max was changed to TYP.

2-1. Touch Screen Board Specification... (Max) was deleted from Number of Electrodes.

2-1. Touch Screen Board Specification...The Item DFU was deleted.

Outline Dimensional Drawing was moved to the last page.

2-4. Connector Pin Assignment...CN4 was deleted.

2-4-2. Connector Terminal.....Clerical mistakes under Terminal Name and Description were corrected.

2-4-2. Connector Terminal.....The descriptions for the unused terminals on CN5 was changed to "Unused".

Ver1.1 (November 2, 2012)

Changes from ver1.0

2-1. Touch Screen Board Specification.....Electrode resolution 512 → 256 (Clerical mistake was corrected.)

2-2. Host Interface.....USB Interface VendorID/Product ID was changed (Specification changed).

5. Warranty

5-1. Warranty Period

- § The warranty period is limited to 1 year from the date of shipping. The warranty for the initial deflection such as appearance deflection is limited to 1 month.
- § Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the deflection is considered to be caused by the supplier.
- § The replacement is subject to be included in the next lot.

5-2. Warranty Target

- § The warranty only covers the product itself and does not cover any damage to others caused by using this product. Onsite repair or replacement is not supported.
- § We will do our best for delivery problem and product deflections, but the warranty for the production line is not covered.

5-3. Warranty Exceptions

- Following conditions are not covered with the warranty and subject to charge.
- § Any malfunctions and damages during transportation and transfer by the user.
 - § Any malfunctions and damages caused by a natural disaster or a fire.
 - § Any malfunctions and damages caused by static electricity
 - § Any malfunctions and damages caused by the failure of the associated equipment.
 - § If the product is remodeled, disassembled or repaired by the user.
 - § If the product is glued onto the equipment and uninstalled.
 - § Any malfunctions and damages caused by an improper usage and handling against the specifications and notes.

6. Precautions for Use

6-1. General Handling

- § Keep the product away from any conductive objects while in use.
- § Do not touch the conductive part of the product to avoid being damaged by the electrostatic discharge. Follow the proper procedure for handling.
- § Keep the product in the proper storing environment and avoid any load to the product.
- § Do not use or store the product in the severe condition like following:
Wet environment or a condition where the product is likely to get wet. Where dew condensation is likely to occur. Near solvent or acid.
- § Do not take apart or alter the product.

6-2. Others



- § The contents of this document are subject to change without notice.
- § The manufacturer or sales representatives will not be liable for any damages or loss arising from use of this product.
- § This product is intended for use in standard applications (computers, office automation, and other office equipment, industrial, communications, and measurement equipment, personal and household devices, etc.) Please avoid using this product for special applications where failure or abnormal operation may directly affect human lives, or cause physical injury or property damage, or where extremely high levels of reliability are required (such as aerospace systems, vehicle operating control, atomic energy controls, medical devices for life support, etc.).
- § Any semiconductor devices have inherently a certain rate of failure. The user must protect against injury, damage, or loss from such failures by incorporating safety design measures into the user's facility and equipment.

DUS3000 Product Specification
Ver1.1 issued on November 2, 2012
©2012 DMC Co., Ltd.

This document can be freely distributed, but any alternation to this document is prohibited.



DMC Co., Ltd.
<http://www.dmccoltd.com/english/>
11F Nisseki Takanawa Bldg., 2-18-10 Takanawa, Minato-ku, Tokyo 108-0074, Japan
Phone: +81-3-6721-6731 (Japanese), 6736 (English) Fax: +81-3-6721-6732

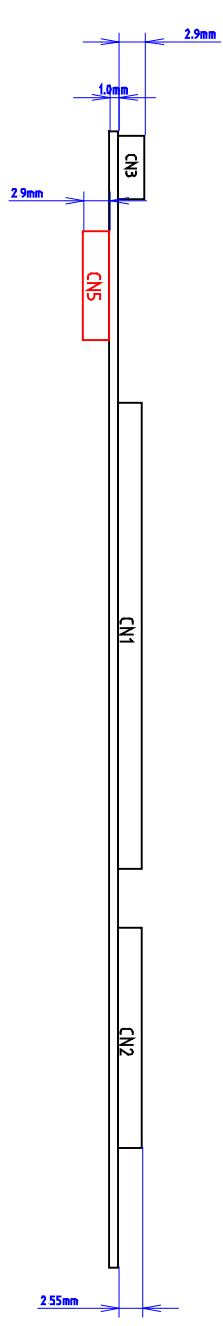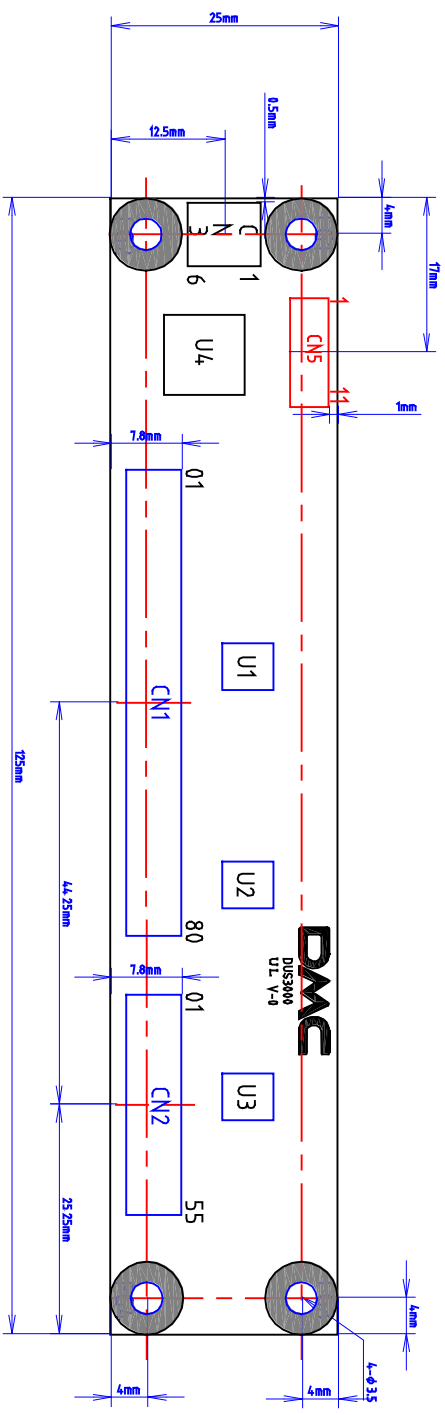

Unit = mm

Date	P/N
September 6, 2012	DUS3000
Name	
Dimensional Drawing	
Rev.1	

DMC Co., Ltd.

Our company network supports you worldwide with offices in Germany, Great Britain, Italy, Turkey and the USA. For more information please contact:



DATA DISPLAY GROUP

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom

Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1 Ronkonkoma, NY
11779
United States of America

Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com

Sales Partner:**REM Italy s.a.s.**

di Michieletto Flavio & C.
Via Obbia Bassa, 10
I-35010 Trebaseleghe (PD)
Italy
Phone: +39 335 521 37 89
E-Mail: info@remitaly.com
Internet: www.remitaly.com

Sales Partner:**DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ
İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ**

Barbaros Mh Ak Zamabak Sk A Blok
D:143 Ataşehir/İstanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr