



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

AUO

G240HW01V0

UP-02-104R1.1

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



Product Specification

G240HW01 V0

AU OPTRONICS CORPORATION

Preliminary Specification

Final Specification

| | |
|-------------------|---------------------|
| Module | 24.0" Color TFT-LCD |
| Model Name | G240HW01 V0 |

| | |
|--|-------------|
| Customer | Date |
| _____ | _____ |
| Checked & Approved by | |
| _____ | _____ |
| <p>Note: This Specification is subject to change without notice.</p> | |

| | |
|---|-------------|
| Approved by | Date |
| Crystal Hsieh | 2016/07/04 |
| Prepared by | |
| Jimmy Tsai | 2016/07/04 |
| <p>General Display Business Division / AU Optronics corporation</p> | |



Contents

1. Operating Precautions5

2. General Description6

 2.1 Display Characteristics 6

 2.2 Optical Characteristics..... 7

3. Functional Block Diagram10

4. Absolute Maximum Ratings.....11

 4.1 TFT LCD Module 11

 4.2 Backlight Unit..... 11

 4.3 Absolute Ratings of Environment 11

5. Electrical Characteristics.....12

 5.1 TFT LCD Module 12

 5.2 Backlight Unit..... 14

6. Signal Characteristic.....15

 6.1 Pixel Format Image 15

 6.2 Signal Description..... 16

 6.3 The Input Data Format 17

 6.4 Interface Timing 18

 6.5 Power ON/OFF Sequence..... 19

7. Connector & Pin Assignment20

 7.1 TFT LCD Module: LVDS Connector 20

 7.2 Backlight Unit: LED Connector 21

8. Reliability Test22

9. Mechanical Characteristics23

10. Label and Packaging24

 10.1 Shipping Label (on the rear side of TFT-LCD display)..... 24

 10.2 Carton Package..... 24

11. Safety25

 11.1 Sharp Edge Requirements..... 25

 11.2 Materials 25

 11.3 Capacitors..... 25

 11.4 National Test Lab Requirement..... 25



Product Specification

G240HW01 V0

AU OPTRONICS CORPORATION

Record of Revision

| Version and Date | Page | Old description | New Description | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------------|-------------------------------------|--|--|------------------------|------------------------------------|-------------------|-------------------|------------------------------------|----------------------------|-------------------|----------------------------|-------------------|---------------------------------|----------------------------|-------------------|-------------------|---------------------------------|----------------------------------|--------------------------------|------------------|-------------------|-------------------|-------------------------------|------------------------------------|------------------|-----------------|--------------------|--|----------------------------|---------------------|-------------------|-------------------|------------------------------------|---------------------------------|------------------|-----------------|---------------------------------|----------------------------------|-------------------------------------|-----------------|----------------------------------|------------------|---|----------------------------------|-------------------------------|------------------|------------------|-----------------------------|--------------------|--------------------|-------|-------|---|----------------------|------------------------|-------------------|-------------------|-------------------|------------------------------|----------------------------|-------------------|-----------------|-------------------|-------------------------------|----------------------------|-------|------------------|-------|---------------------|--------------------------------|---|-----------------|-------|----------------------|------------------------------------|------------------|-------|------------------|----------------------|----------------------------|----------------|------------------|------------------|---|---------------------------------|-----------------|---|------------------|----------------------------------|-------------------------------------|---|------------------|---|-----------------------------|----------------------------------|---|------------------|---|-----------------------------|--|--------------------|---|---|--|
| 0.1 2011/02/15 | All | First Edition for Customer | All | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.2 2011/03/10 | 13 | | <table border="1"> <tr> <td>FWM^o</td> <td>PWM Dimming Frequency^o</td> <td>200^o</td> <td>→</td> <td>20k^o</td> <td>Hz^o</td> </tr> <tr> <td>→</td> <td>Swing Voltage^o</td> <td>0^o</td> <td>3.3^o</td> <td>3.6^o</td> <td>Volt^o</td> </tr> <tr> <td>→</td> <td>Dimming Duty Cycle^o</td> <td>10^o</td> <td>→</td> <td>100^o</td> <td>%^o</td> </tr> </table> | FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | Hz ^o | → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | Volt ^o | → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | % ^o | Add | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | Hz ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | Volt ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | % ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.3 2011/05/11 | 22 | Old drawing | Update to new one (adding 3 ribs) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.4 2011/06/13 | 5 | Contrast ratio: 3,000 : 1 | Contrast ratio: 5,000 : 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | <table border="1"> <tr><td>Red x₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>Red y₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>Green x₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>Green y₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>Blue x₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>Blue y₁</td><td>→</td><td>TBD</td><td>→</td><td></td></tr> <tr><td>White x₁</td><td>→</td><td>0.313</td><td>→</td><td></td></tr> <tr><td>White y₁</td><td>→</td><td>0.329</td><td>→</td><td></td></tr> </table> | Red x ₁ | → | TBD | → | | Red y ₁ | → | TBD | → | | Green x ₁ | → | TBD | → | | Green y ₁ | → | TBD | → | | Blue x ₁ | → | TBD | → | | Blue y ₁ | → | TBD | → | | White x ₁ | → | 0.313 | → | | White y ₁ | → | 0.329 | → | | <table border="1"> <tr><td>Red x₁</td><td>→</td><td>0.693</td><td>0.643</td><td>0.693</td></tr> <tr><td>Red y₁</td><td>→</td><td>0.289</td><td>0.339</td><td>0.389</td></tr> <tr><td>Green x₁</td><td>→</td><td>0.279</td><td>0.329</td><td>0.379</td></tr> <tr><td>Green y₁</td><td>→</td><td>0.574</td><td>0.624</td><td>0.674</td></tr> <tr><td>Blue x₁</td><td>→</td><td>0.105</td><td>0.155</td><td>0.205</td></tr> <tr><td>Blue y₁</td><td>→</td><td>0</td><td>0.048</td><td>0.098</td></tr> <tr><td>White x₁</td><td>→</td><td>0.263</td><td>0.313</td><td>0.363</td></tr> <tr><td>White y₁</td><td>→</td><td>0.279</td><td>0.329</td><td>0.379</td></tr> </table> | Red x ₁ | → | 0.693 | 0.643 | 0.693 | Red y ₁ | → | 0.289 | 0.339 | 0.389 | Green x ₁ | → | 0.279 | 0.329 | 0.379 | Green y ₁ | → | 0.574 | 0.624 | 0.674 | Blue x ₁ | → | 0.105 | 0.155 | 0.205 | Blue y ₁ | → | 0 | 0.048 | 0.098 | White x ₁ | → | 0.263 | 0.313 | 0.363 | White y ₁ | → | 0.279 | 0.329 | 0.379 | | | | | | | | | | | | | | | | | | | | | |
| Red x ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Red y ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Green x ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Green y ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Blue x ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Blue y ₁ | → | TBD | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| White x ₁ | → | 0.313 | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| White y ₁ | → | 0.329 | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Red x ₁ | → | 0.693 | 0.643 | 0.693 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Red y ₁ | → | 0.289 | 0.339 | 0.389 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Green x ₁ | → | 0.279 | 0.329 | 0.379 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Green y ₁ | → | 0.574 | 0.624 | 0.674 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Blue x ₁ | → | 0.105 | 0.155 | 0.205 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Blue y ₁ | → | 0 | 0.048 | 0.098 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| White x ₁ | → | 0.263 | 0.313 | 0.363 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| White y ₁ | → | 0.279 | 0.329 | 0.379 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5 | Power Consumption ^o [Watt] ^o 45 ^o (without inverter, all black pattern) | Power Consumption ^o [Watt] ^o 36.3 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5 2011/07/07 | 23 | Back bezel has three ribs | Update drawing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 2011/12/12 | 5 | Power= 36.3 W | 30 W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | IF= 120mA | IF= 100mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 13 | <table border="1"> <thead> <tr> <th>Symbol^o</th> <th>Parameter^o</th> <th>Min.^o</th> <th>Typ.^o</th> <th>Max.^o</th> </tr> </thead> <tbody> <tr> <td>V_{CC}^o</td> <td>Input Voltage^o</td> <td>10.8^o</td> <td>12^o</td> <td>12.6^o</td> </tr> <tr> <td>I_{CCS}^o</td> <td>Input Current^o</td> <td>→</td> <td>2.65^o</td> <td>→</td> </tr> <tr> <td>PLED^o</td> <td>Power Consumption^o</td> <td>→</td> <td>31.8^o</td> <td>→</td> </tr> <tr> <td>FWM^o</td> <td>PWM Dimming Frequency^o</td> <td>200^o</td> <td>→</td> <td>20k^o</td> </tr> <tr> <td>→</td> <td>Swing Voltage^o</td> <td>0^o</td> <td>3.3^o</td> <td>3.6^o</td> </tr> <tr> <td>→</td> <td>Dimming Duty Cycle^o</td> <td>10^o</td> <td>→</td> <td>100^o</td> </tr> <tr> <td>V_{analog}^o</td> <td>Analog Dimming Voltage^o</td> <td>→</td> <td>N/A^o</td> <td>→</td> </tr> <tr> <td>I_F^o</td> <td>LED Forward Current^o</td> <td>→</td> <td>120^o</td> <td>130^o</td> </tr> <tr> <td>Operating Life^o</td> <td></td> <td>50000^o</td> <td>→</td> <td>→</td> </tr> </tbody> </table> | Symbol ^o | Parameter ^o | Min. ^o | Typ. ^o | Max. ^o | V _{CC} ^o | Input Voltage ^o | 10.8 ^o | 12 ^o | 12.6 ^o | I _{CCS} ^o | Input Current ^o | → | 2.65 ^o | → | PLED ^o | Power Consumption ^o | → | 31.8 ^o | → | FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | V _{analog} ^o | Analog Dimming Voltage ^o | → | N/A ^o | → | I _F ^o | LED Forward Current ^o | → | 120 ^o | 130 ^o | Operating Life ^o | | 50000 ^o | → | → | <table border="1"> <thead> <tr> <th>Symbol^o</th> <th>Parameter^o</th> <th>Min.^o</th> <th>Typ.^o</th> <th>Max.^o</th> </tr> </thead> <tbody> <tr> <td>V_{CC}^o</td> <td>Input Voltage^o</td> <td>10.8^o</td> <td>12^o</td> <td>13.2^o</td> </tr> <tr> <td>I_{CCS}^o</td> <td>Input Current^o</td> <td>→</td> <td>2.0^o</td> <td>→</td> </tr> <tr> <td>PLED^o</td> <td>Power Consumption^o</td> <td>→</td> <td>24^o</td> <td>→</td> </tr> <tr> <td>FWM^o</td> <td>PWM Dimming Frequency^o</td> <td>200^o</td> <td>→</td> <td>20k^o</td> </tr> <tr> <td>→</td> <td>Swing Voltage^o</td> <td>0^o</td> <td>3.3^o</td> <td>3.6^o</td> </tr> <tr> <td>→</td> <td>Dimming Duty Cycle^o</td> <td>10^o</td> <td>→</td> <td>100^o</td> </tr> <tr> <td>V_{analog}^o</td> <td>Analog Dimming Voltage^o</td> <td>→</td> <td>N/A^o</td> <td>→</td> </tr> <tr> <td>I_F^o</td> <td>LED Forward Current^o</td> <td>→</td> <td>100^o</td> <td>→</td> </tr> <tr> <td>Operating Life^o</td> <td></td> <td>50000^o</td> <td>→</td> <td>→</td> </tr> </tbody> </table> | Symbol ^o | Parameter ^o | Min. ^o | Typ. ^o | Max. ^o | V _{CC} ^o | Input Voltage ^o | 10.8 ^o | 12 ^o | 13.2 ^o | I _{CCS} ^o | Input Current ^o | → | 2.0 ^o | → | PLED ^o | Power Consumption ^o | → | 24 ^o | → | FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | V _{analog} ^o | Analog Dimming Voltage ^o | → | N/A ^o | → | I _F ^o | LED Forward Current ^o | → | 100 ^o | → | Operating Life ^o | | 50000 ^o | → | → | |
| Symbol ^o | Parameter ^o | Min. ^o | Typ. ^o | Max. ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{CC} ^o | Input Voltage ^o | 10.8 ^o | 12 ^o | 12.6 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{CCS} ^o | Input Current ^o | → | 2.65 ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLED ^o | Power Consumption ^o | → | 31.8 ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{analog} ^o | Analog Dimming Voltage ^o | → | N/A ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _F ^o | LED Forward Current ^o | → | 120 ^o | 130 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Life ^o | | 50000 ^o | → | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Symbol ^o | Parameter ^o | Min. ^o | Typ. ^o | Max. ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{CC} ^o | Input Voltage ^o | 10.8 ^o | 12 ^o | 13.2 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{CCS} ^o | Input Current ^o | → | 2.0 ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLED ^o | Power Consumption ^o | → | 24 ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Dimming Duty Cycle ^o | 10 ^o | → | 100 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{analog} ^o | Analog Dimming Voltage ^o | → | N/A ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _F ^o | LED Forward Current ^o | → | 100 ^o | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Life ^o | | 50000 ^o | → | → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.1 2012/03/22 | 24 | Max capacity: 24 TFT-LCD module per carton (8 pgs * 1 layers) Max weight: 21 kg per carton ^o Outside dimension of carton: 412 mm x 281 mm x 650 mm ^o | 102 Carton Package <ul style="list-style-type: none"> The outside dimension of carton is 412 x 281 x 650 (mm) 8 pieces per carton box 24 boxes per layer, 8 or 2 layer/pallet. By sea, refer packing documents. Pallet size (not include carton boxes): 1148 mm * 580 mm * 180 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 2012/04/11 | 13 | | <table border="1"> <tr> <td>FWM^o</td> <td>PWM Dimming Frequency^o</td> <td>200^o</td> <td>→</td> <td>20k^o</td> <td>Hz^o</td> </tr> <tr> <td>→</td> <td>Swing Voltage^o</td> <td>0^o</td> <td>3.3^o</td> <td>3.6^o</td> <td>Volt^o</td> </tr> </table> | FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | Hz ^o | → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | Volt ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FWM ^o | PWM Dimming Frequency ^o | 200 ^o | → | 20k ^o | Hz ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| → | Swing Voltage ^o | 0 ^o | 3.3 ^o | 3.6 ^o | Volt ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.3 2013/05/23 | 20 | Connector Model Number ^o MS24049HJ ^o Mating Model Number ^o 2404PS-2 or compatible ^o | Connector Model Number ^o MS24049HJ ^o Mating Housing Part Number ^o P24049 or compatible ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.4 2014/05/26 | 22 | (1) LED wire fixing tape (2) Shielding outline (3) LED connector | (1) Enlarge the size of tape (2) Shielding remove punch (3) Locked type connector | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.5 2014/07/09 | 15 | 15 ^o RXinE1+ ^o Positive LVDS differential data input (Even data) ^o 16 ^o RXinE1+ ^o Negative LVDS differential data input (Even data) ^o | 15 ^o RXinE1+ ^o Negative LVDS differential data input (Even data) ^o 16 ^o RXinE1+ ^o Positive LVDS differential data input (Even data) ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.6 2014/11/14 | 6 | Color Gamut ^o % ^o → 69 ^o → | Color Gamut ^o % ^o → 72 ^o → | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 19 | LVDS connector | Add drawing marked pin 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.7 2014/12/26 | 5 | Weight ^o [g] ^o 2300 (typical) | Weight ^o [g] ^o 2130 (typical) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.8 2015/08/26 | 6 | Temperature Range ^o Operating ^o Storage (Shipping) ^o [°C] ^o [°C] ^o 0 to +50 ^o -20 to +60 ^o | Temperature Range ^o Operating ^o Storage (Shipping) ^o [°C] ^o [°C] ^o -20 to +70 ^o -30 to +80 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 11 | <table border="1"> <thead> <tr> <th>Item^o</th> <th>Symbol^o</th> <th>Min.^o</th> <th>Max.^o</th> <th>Unit^o</th> </tr> </thead> <tbody> <tr> <td>Operating Temperature^o</td> <td>TOP^o</td> <td>0^o</td> <td>+50^o</td> <td>[°C]^o</td> </tr> <tr> <td>Operation Humidity^o</td> <td>HOP^o</td> <td>5^o</td> <td>90^o</td> <td>[%RH]^o</td> </tr> <tr> <td>Storage Temperature^o</td> <td>TST^o</td> <td>-20^o</td> <td>+60^o</td> <td>[°C]^o</td> </tr> <tr> <td>Storage Humidity^o</td> <td>HST^o</td> <td>5^o</td> <td>90^o</td> <td>[%RH]^o</td> </tr> </tbody> </table> | Item ^o | Symbol ^o | Min. ^o | Max. ^o | Unit ^o | Operating Temperature ^o | TOP ^o | 0 ^o | +50 ^o | [°C] ^o | Operation Humidity ^o | HOP ^o | 5 ^o | 90 ^o | [%RH] ^o | Storage Temperature ^o | TST ^o | -20 ^o | +60 ^o | [°C] ^o | Storage Humidity ^o | HST ^o | 5 ^o | 90 ^o | [%RH] ^o | <table border="1"> <thead> <tr> <th>Item^o</th> <th>Symbol^o</th> <th>Min.^o</th> <th>Max.^o</th> </tr> </thead> <tbody> <tr> <td>Operating Temperature^o</td> <td>TOP^o</td> <td>-20^o</td> <td>70^o</td> </tr> <tr> <td>Operation Humidity^o</td> <td>HOP^o</td> <td>5^o</td> <td>90^o</td> </tr> <tr> <td>Storage Temperature^o</td> <td>TST^o</td> <td>-30^o</td> <td>80^o</td> </tr> <tr> <td>Storage Humidity^o</td> <td>HST^o</td> <td>5^o</td> <td>90^o</td> </tr> </tbody> </table> | Item ^o | Symbol ^o | Min. ^o | Max. ^o | Operating Temperature ^o | TOP ^o | -20 ^o | 70 ^o | Operation Humidity ^o | HOP ^o | 5 ^o | 90 ^o | Storage Temperature ^o | TST ^o | -30 ^o | 80 ^o | Storage Humidity ^o | HST ^o | 5 ^o | 90 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item ^o | Symbol ^o | Min. ^o | Max. ^o | Unit ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Temperature ^o | TOP ^o | 0 ^o | +50 ^o | [°C] ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operation Humidity ^o | HOP ^o | 5 ^o | 90 ^o | [%RH] ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage Temperature ^o | TST ^o | -20 ^o | +60 ^o | [°C] ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage Humidity ^o | HST ^o | 5 ^o | 90 ^o | [%RH] ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item ^o | Symbol ^o | Min. ^o | Max. ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Temperature ^o | TOP ^o | -20 ^o | 70 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operation Humidity ^o | HOP ^o | 5 ^o | 90 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage Temperature ^o | TST ^o | -30 ^o | 80 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage Humidity ^o | HST ^o | 5 ^o | 90 ^o | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



Product Specification

G240HW01 V0

AU OPTRONICS CORPORATION

| | 14 | <table border="1"> <thead> <tr> <th>Symbol¹⁾</th> <th>Parameter²⁾</th> <th>Min³⁾</th> <th>Typ⁴⁾</th> <th>Max⁵⁾</th> <th>Unit⁶⁾</th> <th>Remark⁷⁾</th> </tr> </thead> <tbody> <tr> <td>V_{IN}¹⁾</td> <td>Input Voltage²⁾</td> <td>10.8³⁾</td> <td>12⁴⁾</td> <td>13.2⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td>I_{IN}¹⁾</td> <td>Input Current²⁾</td> <td>-³⁾</td> <td>2.8⁴⁾</td> <td>-⁵⁾</td> <td>A⁶⁾</td> <td>100% Dimming⁷⁾</td> </tr> <tr> <td>P_{IN}¹⁾</td> <td>Power Consumption²⁾</td> <td>-³⁾</td> <td>24⁴⁾</td> <td>-⁵⁾</td> <td>Watt⁶⁾</td> <td>100% Dimming, Note3⁷⁾</td> </tr> <tr> <td>f_{SW}¹⁾</td> <td>FWM Dimming Frequency²⁾</td> <td>23.3³⁾</td> <td>-⁴⁾</td> <td>23.3⁵⁾</td> <td>Hz⁶⁾</td> <td></td> </tr> <tr> <td>V_{SW}¹⁾</td> <td>Swing Voltage²⁾</td> <td>3.3³⁾</td> <td>3.3⁴⁾</td> <td>5⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td>T_{ON}¹⁾</td> <td>Dimming Duty Cycle²⁾</td> <td>10³⁾</td> <td>-⁴⁾</td> <td>100⁵⁾</td> <td>%⁶⁾</td> <td></td> </tr> <tr> <td>V_{ANALOG}¹⁾</td> <td>Analog Dimming Voltage²⁾</td> <td>-³⁾</td> <td>N/A⁴⁾</td> <td>-⁵⁾</td> <td>-⁶⁾</td> <td>No Analog Dimming⁷⁾</td> </tr> <tr> <td>I_{FW}¹⁾</td> <td>FFWM Forward Current²⁾</td> <td>-³⁾</td> <td>100⁴⁾</td> <td>-⁵⁾</td> <td>mA⁶⁾</td> <td>Ta = 25°C⁷⁾</td> </tr> <tr> <td>Operating Life¹⁾</td> <td></td> <td>50000³⁾</td> <td>-⁴⁾</td> <td>-⁵⁾</td> <td>hrs⁶⁾</td> <td>Ta = 25°C⁷⁾</td> </tr> </tbody> </table> | Symbol ¹⁾ | Parameter ²⁾ | Min ³⁾ | Typ ⁴⁾ | Max ⁵⁾ | Unit ⁶⁾ | Remark ⁷⁾ | V _{IN} ¹⁾ | Input Voltage ²⁾ | 10.8 ³⁾ | 12 ⁴⁾ | 13.2 ⁵⁾ | Volt ⁶⁾ | | I _{IN} ¹⁾ | Input Current ²⁾ | - ³⁾ | 2.8 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | 100% Dimming ⁷⁾ | P _{IN} ¹⁾ | Power Consumption ²⁾ | - ³⁾ | 24 ⁴⁾ | - ⁵⁾ | Watt ⁶⁾ | 100% Dimming, Note3 ⁷⁾ | f _{SW} ¹⁾ | FWM Dimming Frequency ²⁾ | 23.3 ³⁾ | - ⁴⁾ | 23.3 ⁵⁾ | Hz ⁶⁾ | | V _{SW} ¹⁾ | Swing Voltage ²⁾ | 3.3 ³⁾ | 3.3 ⁴⁾ | 5 ⁵⁾ | Volt ⁶⁾ | | T _{ON} ¹⁾ | Dimming Duty Cycle ²⁾ | 10 ³⁾ | - ⁴⁾ | 100 ⁵⁾ | % ⁶⁾ | | V _{ANALOG} ¹⁾ | Analog Dimming Voltage ²⁾ | - ³⁾ | N/A ⁴⁾ | - ⁵⁾ | - ⁶⁾ | No Analog Dimming ⁷⁾ | I _{FW} ¹⁾ | FFWM Forward Current ²⁾ | - ³⁾ | 100 ⁴⁾ | - ⁵⁾ | mA ⁶⁾ | Ta = 25°C ⁷⁾ | Operating Life ¹⁾ | | 50000 ³⁾ | - ⁴⁾ | - ⁵⁾ | hrs ⁶⁾ | Ta = 25°C ⁷⁾ | <table border="1"> <thead> <tr> <th>Symbol¹⁾</th> <th>Parameter²⁾</th> <th>Min³⁾</th> <th>Typ⁴⁾</th> <th>Max⁵⁾</th> <th>Units⁶⁾</th> <th>Remark⁷⁾</th> </tr> </thead> <tbody> <tr> <td>V_{IN}¹⁾</td> <td>Input Voltage²⁾</td> <td>10.8³⁾</td> <td>12⁴⁾</td> <td>13.2⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td>I_{IN}¹⁾</td> <td>Input Current²⁾</td> <td>-³⁾</td> <td>2.8⁴⁾</td> <td>-⁵⁾</td> <td>A⁶⁾</td> <td>100% Dimming⁷⁾</td> </tr> <tr> <td>P_{IN}¹⁾</td> <td>Power Consumption²⁾</td> <td>-³⁾</td> <td>24⁴⁾</td> <td>-⁵⁾</td> <td>Watt⁶⁾</td> <td>100% Dimming, Note3⁷⁾</td> </tr> <tr> <td>I_{IN}EN¹⁾</td> <td>Inch Current²⁾</td> <td>-³⁾</td> <td>4⁴⁾</td> <td>-⁵⁾</td> <td>A⁶⁾</td> <td></td> </tr> <tr> <td>BL_EN¹⁾</td> <td>On Control Voltage²⁾</td> <td>3³⁾</td> <td>-⁴⁾</td> <td>5⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td></td> <td>Off Control Voltage²⁾</td> <td>0³⁾</td> <td>-⁴⁾</td> <td>0.5⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td></td> <td>FFWM Dimming Frequency²⁾</td> <td>200³⁾</td> <td>-⁴⁾</td> <td>200⁵⁾</td> <td>Hz⁶⁾</td> <td></td> </tr> <tr> <td>FFWM¹⁾</td> <td>High Voltage²⁾</td> <td>3.0³⁾</td> <td>3.3⁴⁾</td> <td>5.5⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td></td> <td>Low Voltage²⁾</td> <td>0³⁾</td> <td>-⁴⁾</td> <td>0.5⁵⁾</td> <td>Volt⁶⁾</td> <td></td> </tr> <tr> <td></td> <td>Limiting Duty Cycle²⁾</td> <td>10³⁾</td> <td>-⁴⁾</td> <td>100⁵⁾</td> <td>%⁶⁾</td> <td></td> </tr> <tr> <td>I_{FW}¹⁾</td> <td>FFWM Forward Current²⁾</td> <td>-³⁾</td> <td>100⁴⁾</td> <td>-⁵⁾</td> <td>mA⁶⁾</td> <td>Ta = 25°C⁷⁾</td> </tr> <tr> <td>Operating Life¹⁾</td> <td></td> <td>50000³⁾</td> <td>-⁴⁾</td> <td>-⁵⁾</td> <td>hrs⁶⁾</td> <td>Ta = 25°C⁷⁾</td> </tr> </tbody> </table> | Symbol ¹⁾ | Parameter ²⁾ | Min ³⁾ | Typ ⁴⁾ | Max ⁵⁾ | Units ⁶⁾ | Remark ⁷⁾ | V _{IN} ¹⁾ | Input Voltage ²⁾ | 10.8 ³⁾ | 12 ⁴⁾ | 13.2 ⁵⁾ | Volt ⁶⁾ | | I _{IN} ¹⁾ | Input Current ²⁾ | - ³⁾ | 2.8 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | 100% Dimming ⁷⁾ | P _{IN} ¹⁾ | Power Consumption ²⁾ | - ³⁾ | 24 ⁴⁾ | - ⁵⁾ | Watt ⁶⁾ | 100% Dimming, Note3 ⁷⁾ | I _{IN} EN ¹⁾ | Inch Current ²⁾ | - ³⁾ | 4 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | | BL_EN ¹⁾ | On Control Voltage ²⁾ | 3 ³⁾ | - ⁴⁾ | 5 ⁵⁾ | Volt ⁶⁾ | | | Off Control Voltage ²⁾ | 0 ³⁾ | - ⁴⁾ | 0.5 ⁵⁾ | Volt ⁶⁾ | | | FFWM Dimming Frequency ²⁾ | 200 ³⁾ | - ⁴⁾ | 200 ⁵⁾ | Hz ⁶⁾ | | FFWM ¹⁾ | High Voltage ²⁾ | 3.0 ³⁾ | 3.3 ⁴⁾ | 5.5 ⁵⁾ | Volt ⁶⁾ | | | Low Voltage ²⁾ | 0 ³⁾ | - ⁴⁾ | 0.5 ⁵⁾ | Volt ⁶⁾ | | | Limiting Duty Cycle ²⁾ | 10 ³⁾ | - ⁴⁾ | 100 ⁵⁾ | % ⁶⁾ | | I _{FW} ¹⁾ | FFWM Forward Current ²⁾ | - ³⁾ | 100 ⁴⁾ | - ⁵⁾ | mA ⁶⁾ | Ta = 25°C ⁷⁾ | Operating Life ¹⁾ | | 50000 ³⁾ | - ⁴⁾ | - ⁵⁾ | hrs ⁶⁾ | Ta = 25°C ⁷⁾ |
|-----------------------------------|--------------------------------------|---|---|-------------------------|-------------------------------------|-----------------------------------|------------------------|--|---|-------------------------------|-----------------------------|--|------------------|------------------------|---|--|-------------------------------|-----------------------------|-----------------|-------------------|-----------------|-----------------|----------------------------|-------------------------------|---------------------------------|-----------------|------------------|-----------------|--------------------|-----------------------------------|-------------------------------|-------------------------------------|--------------------|-----------------|--------------------|------------------|--|-------------------------------|-----------------------------|-------------------|-------------------|-----------------|--------------------|--|-------------------------------|----------------------------------|------------------|-----------------|-------------------|-----------------|--|-----------------------------------|--------------------------------------|-----------------|-------------------|-----------------|-----------------|---------------------------------|-------------------------------|------------------------------------|-----------------|-------------------|-----------------|------------------|-------------------------|------------------------------|--|---------------------|-----------------|-----------------|-------------------|-------------------------|--|----------------------|-------------------------|-------------------|-------------------|-------------------|---------------------|----------------------|-------------------------------|-----------------------------|--------------------|------------------|--------------------|--------------------|--|-------------------------------|-----------------------------|-----------------|-------------------|-----------------|-----------------|----------------------------|-------------------------------|---------------------------------|-----------------|------------------|-----------------|--------------------|-----------------------------------|----------------------------------|----------------------------|-----------------|-----------------|-----------------|-----------------|--|---------------------|----------------------------------|-----------------|-----------------|-----------------|--------------------|--|--|-----------------------------------|-----------------|-----------------|-------------------|--------------------|--|--|--------------------------------------|-------------------|-----------------|-------------------|------------------|--|--------------------|----------------------------|-------------------|-------------------|-------------------|--------------------|--|--|---------------------------|-----------------|-----------------|-------------------|--------------------|--|--|-----------------------------------|------------------|-----------------|-------------------|-----------------|--|-------------------------------|------------------------------------|-----------------|-------------------|-----------------|------------------|-------------------------|------------------------------|--|---------------------|-----------------|-----------------|-------------------|-------------------------|
| Symbol ¹⁾ | Parameter ²⁾ | Min ³⁾ | Typ ⁴⁾ | Max ⁵⁾ | Unit ⁶⁾ | Remark ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{IN} ¹⁾ | Input Voltage ²⁾ | 10.8 ³⁾ | 12 ⁴⁾ | 13.2 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{IN} ¹⁾ | Input Current ²⁾ | - ³⁾ | 2.8 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | 100% Dimming ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P _{IN} ¹⁾ | Power Consumption ²⁾ | - ³⁾ | 24 ⁴⁾ | - ⁵⁾ | Watt ⁶⁾ | 100% Dimming, Note3 ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| f _{SW} ¹⁾ | FWM Dimming Frequency ²⁾ | 23.3 ³⁾ | - ⁴⁾ | 23.3 ⁵⁾ | Hz ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{SW} ¹⁾ | Swing Voltage ²⁾ | 3.3 ³⁾ | 3.3 ⁴⁾ | 5 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T _{ON} ¹⁾ | Dimming Duty Cycle ²⁾ | 10 ³⁾ | - ⁴⁾ | 100 ⁵⁾ | % ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{ANALOG} ¹⁾ | Analog Dimming Voltage ²⁾ | - ³⁾ | N/A ⁴⁾ | - ⁵⁾ | - ⁶⁾ | No Analog Dimming ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{FW} ¹⁾ | FFWM Forward Current ²⁾ | - ³⁾ | 100 ⁴⁾ | - ⁵⁾ | mA ⁶⁾ | Ta = 25°C ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Life ¹⁾ | | 50000 ³⁾ | - ⁴⁾ | - ⁵⁾ | hrs ⁶⁾ | Ta = 25°C ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Symbol ¹⁾ | Parameter ²⁾ | Min ³⁾ | Typ ⁴⁾ | Max ⁵⁾ | Units ⁶⁾ | Remark ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V _{IN} ¹⁾ | Input Voltage ²⁾ | 10.8 ³⁾ | 12 ⁴⁾ | 13.2 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{IN} ¹⁾ | Input Current ²⁾ | - ³⁾ | 2.8 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | 100% Dimming ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P _{IN} ¹⁾ | Power Consumption ²⁾ | - ³⁾ | 24 ⁴⁾ | - ⁵⁾ | Watt ⁶⁾ | 100% Dimming, Note3 ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{IN} EN ¹⁾ | Inch Current ²⁾ | - ³⁾ | 4 ⁴⁾ | - ⁵⁾ | A ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BL_EN ¹⁾ | On Control Voltage ²⁾ | 3 ³⁾ | - ⁴⁾ | 5 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Off Control Voltage ²⁾ | 0 ³⁾ | - ⁴⁾ | 0.5 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | FFWM Dimming Frequency ²⁾ | 200 ³⁾ | - ⁴⁾ | 200 ⁵⁾ | Hz ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FFWM ¹⁾ | High Voltage ²⁾ | 3.0 ³⁾ | 3.3 ⁴⁾ | 5.5 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Low Voltage ²⁾ | 0 ³⁾ | - ⁴⁾ | 0.5 ⁵⁾ | Volt ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limiting Duty Cycle ²⁾ | 10 ³⁾ | - ⁴⁾ | 100 ⁵⁾ | % ⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I _{FW} ¹⁾ | FFWM Forward Current ²⁾ | - ³⁾ | 100 ⁴⁾ | - ⁵⁾ | mA ⁶⁾ | Ta = 25°C ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Life ¹⁾ | | 50000 ³⁾ | - ⁴⁾ | - ⁵⁾ | hrs ⁶⁾ | Ta = 25°C ⁷⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 21 | <table border="1"> <tr> <td>8¹⁾</td> <td>BL_EN²⁾</td> <td>Back light enable, 5V³⁾</td> </tr> <tr> <td>9¹⁾</td> <td>BL_DIM_P²⁾</td> <td>Back light dimming, 3.3V or 5V³⁾</td> </tr> </table> | 8 ¹⁾ | BL_EN ²⁾ | Back light enable, 5V ³⁾ | 9 ¹⁾ | BL_DIM_P ²⁾ | Back light dimming, 3.3V or 5V ³⁾ | <table border="1"> <tr> <td>8¹⁾</td> <td>BL_EN²⁾</td> <td>Back light enable, 3~5.5 V³⁾</td> </tr> <tr> <td>9¹⁾</td> <td>BL_DIM_P²⁾</td> <td>Back light dimming, 3~5.5 V³⁾</td> </tr> </table> | 8 ¹⁾ | BL_EN ²⁾ | Back light enable, 3~5.5 V ³⁾ | 9 ¹⁾ | BL_DIM_P ²⁾ | Back light dimming, 3~5.5 V ³⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 ¹⁾ | BL_EN ²⁾ | Back light enable, 5V ³⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 ¹⁾ | BL_DIM_P ²⁾ | Back light dimming, 3.3V or 5V ³⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 ¹⁾ | BL_EN ²⁾ | Back light enable, 3~5.5 V ³⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 ¹⁾ | BL_DIM_P ²⁾ | Back light dimming, 3~5.5 V ³⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 22 | old reliability test conditions | upgrade reliability test conditions | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 24 | <p>10.2 Carton Package.</p> <ul style="list-style-type: none"> The outside dimension of carton is 412 x 281x 650 (mm).¹⁾ 8 pieces per carton box.²⁾ 2'4 boxes per layer. By air, 2 layer / pallet. By sea, refer packing documents. Pallet size (not include carton boxes) 1110 mm * 630 mm * 160 mm. | <p>10.2 Carton Package.</p> <ul style="list-style-type: none"> The outside dimension of carton is 412 x 282x 661 (mm).¹⁾ 8 pieces per carton box.²⁾ 2'4 boxes per layer. By air, 2 layer / pallet. By sea, refer packing documents. Pallet size (not include carton boxes) 1150 mm * 640 mm * 152 mm. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.9 | 2016/07/04 | 11 Without Temp-Humidity drawing | Add one Temp-Humidity drawing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



1. Operating Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, take it easily, or the TFT Module may be damaged.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 10) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 11) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 12) Severe temperature condition may result in different luminance, response time and LED life time.
- 13) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 14) Continuous displaying fixed pattern may induce image sticking. It is recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.



2. General Description

This specification applies to the 24 inch-wide Color TFT-LCD Module G240HW01 V0. The display supports the Full HD - 1920(H) x 1080(V) screen format and 16.7M colors (RGB 8-bits data). All input signals are dual channel LVDS interface.

LED driver board is included. G240HW01 V0 is designed for industrial display applications.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| ITEMS | Unit | SPECIFICATIONS |
|----------------------------|----------------------|----------------------------------|
| Screen Diagonal | [mm] | 609.7(24.0") |
| Active Area | [mm] | 531.36 (H) x 298.89 (V) |
| Pixels H x V | | 1920(x3) x 1080 |
| Pixel Pitch | [um] | 276.75 (per one triad) ×276.75 |
| Pixel Arrangement | | R.G.B. Vertical Stripe |
| Display Mode | | VA Mode, Normally Black |
| White Luminance (Center) | [cd/m ²] | 300 |
| Contrast Ratio | | 5000: 1 |
| Optical Response Time | [msec] | 25 |
| Nominal Input Voltage VDD | [Volt] | +5.0 V |
| Power Consumption | [Watt] | 30 |
| Weight | [g] | 2130 (typical) |
| Physical Size | [mm] | 556.0 (W) x 323.2 (H) x 17.0 (D) |
| Electrical Interface | | Dual channel LVDS |
| Support Color | | 16.7M colors (true 8-bit) |
| Surface Treatment | | Anti-Glare, 3H |
| Temperature Range | | |
| Operating | [°C] | -20 to +70 |
| Storage (Shipping) | [°C] | -30 to +80 |
| RoHS Compliance | | RoHS Compliance |

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

| Item | Unit | Conditions | Min. | Typ. | Max. | Note |
|---|----------------------|--------------------------------------|-------|-------|-------|---------|
| White Luminance | [cd/m ²] | I _F = 100mA | 240 | 300 | - | 1 |
| Uniformity | % | 9 Points | 75 | 80 | - | 1, 2, 3 |
| Contrast Ratio | | | 3000 | 5000 | - | 4 |
| Cross talk | % | | - | - | 1.5 | 5 |
| Response Time | [msec] | Rising | - | 16 | - | 6 |
| | | Falling | - | 9 | - | |
| | | Rising + Falling | - | 25 | - | |
| Viewing Angle | [degree] | Horizontal (Right) CR = 10 (Left) | 75 | 89 | - | 7 |
| | [degree] | | 75 | 89 | - | |
| | [degree] | Vertical (Upper) CR = 10 (Lower) | 75 | 89 | - | |
| | [degree] | | 75 | 89 | - | |
| Color / Chromaticity Coordinates (CIE 1931) | | Red x | 0.593 | 0.643 | 0.693 | |
| | | Red y | 0.289 | 0.339 | 0.389 | |
| | | Green x | 0.279 | 0.329 | 0.379 | |
| | | Green y | 0.574 | 0.624 | 0.674 | |
| | | Blue x | 0.105 | 0.155 | 0.205 | |
| | | Blue y | 0.000 | 0.048 | 0.098 | |
| | | White x | 0.263 | 0.313 | 0.363 | |
| | | White y | 0.279 | 0.329 | 0.379 | |
| Color Gamut | % | | | 72 | - | |


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)


Aperture 1° with 50cm viewing distance

Test Point Center

Environment < 1 lux

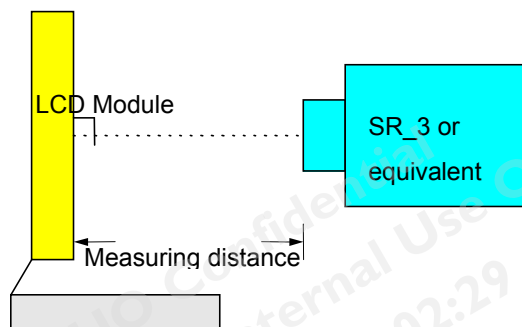

Note 2: Definition of 9 points position. Display active area:

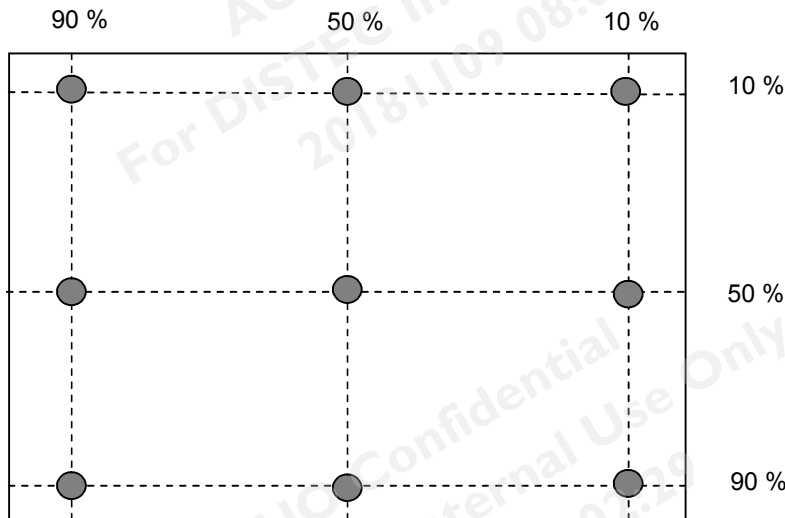

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance

$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4 : Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 5 : Definition of cross talk (CT)

$$CT = |YB - YA| / YA \times 100 (\%)$$

Where


YA = Luminance of measured location without gray level 255 pattern (cd/m²)

YB = Luminance of measured location with gray level 255 pattern (cd/m²)

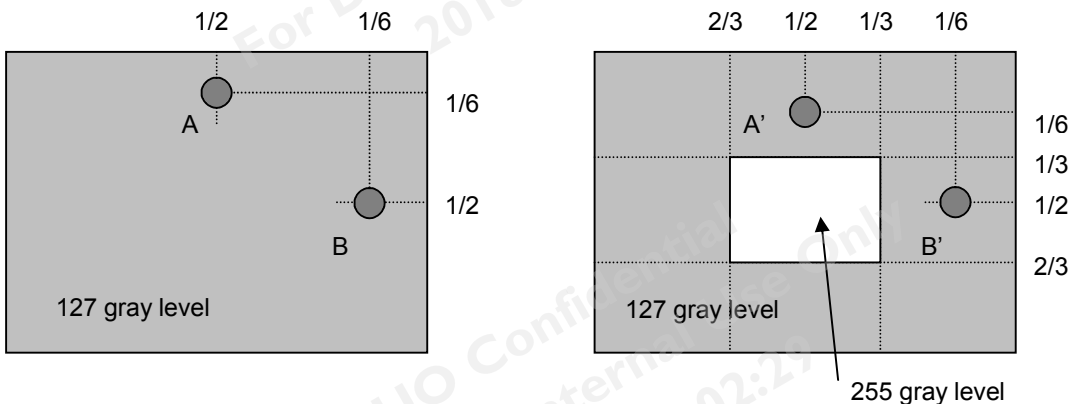


Note 6: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “White” to “Black” (falling time) and from “Black” to “White” (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

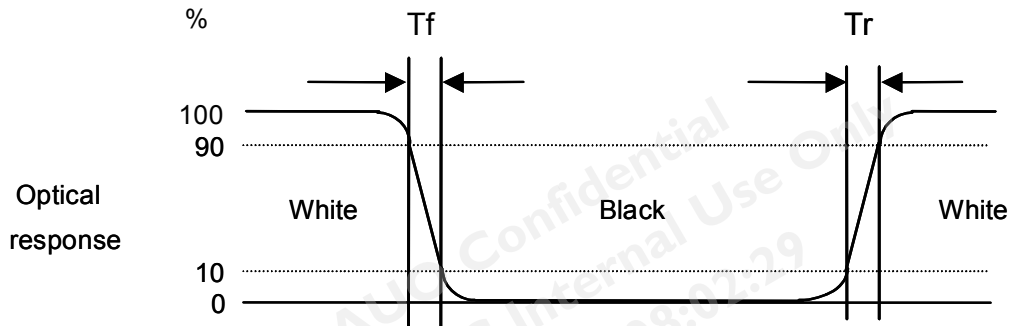


Note 7: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

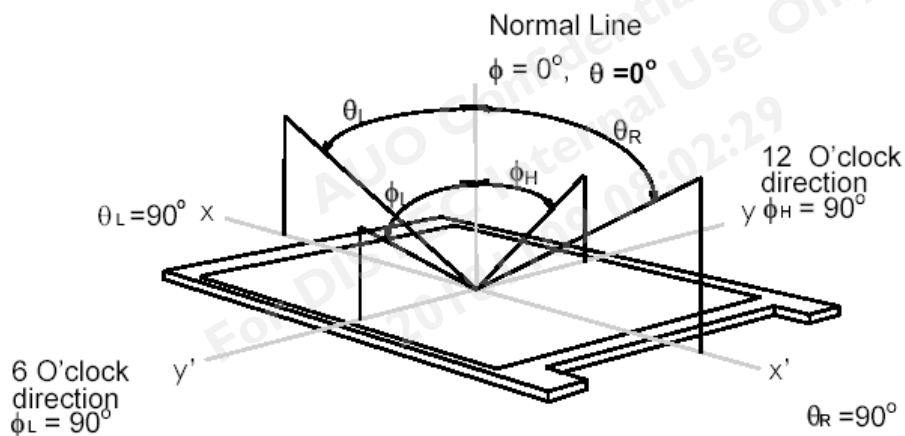

3. Functional Block Diagram

The following diagram shows the functional block of the 24 inches wide Color TFT-LCD Module:

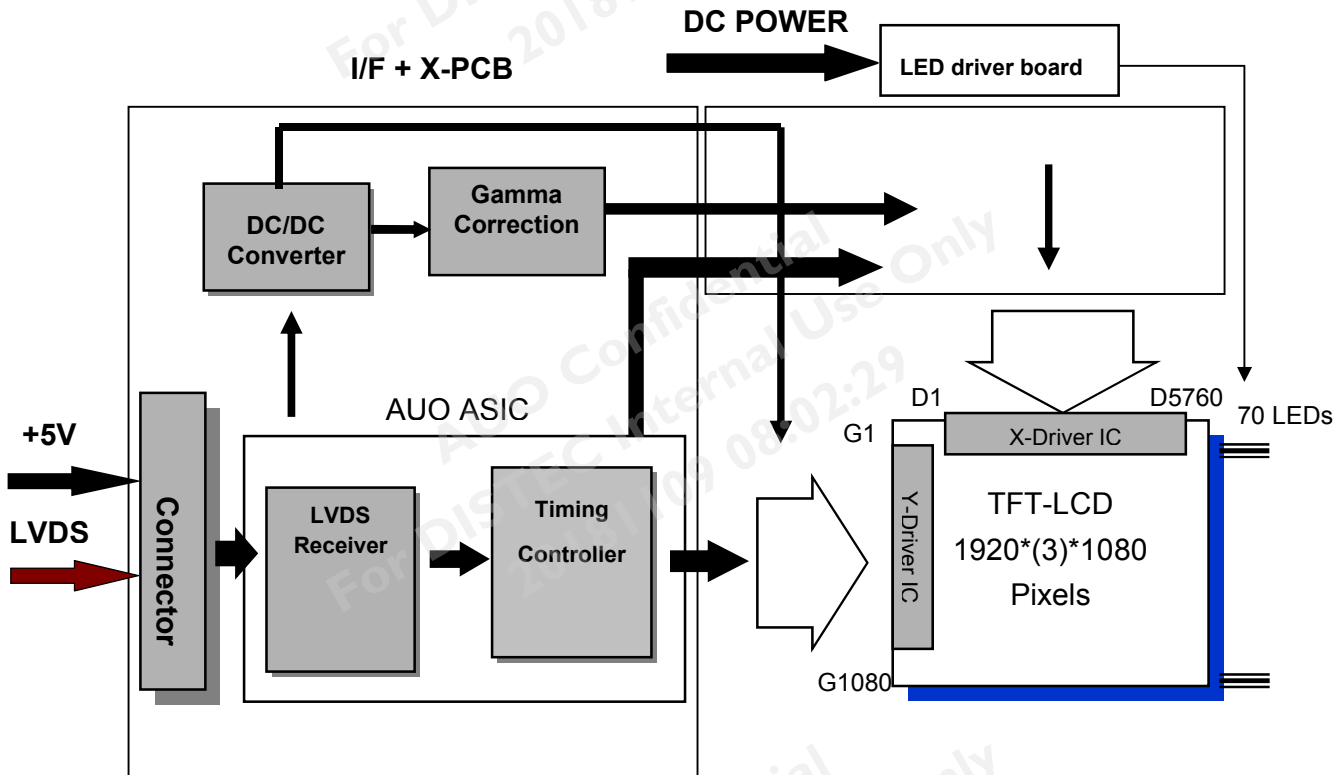

LVDS Connector: JAE (FI-XB30SRL-HF11) or equivalent.

LED Connector: Sin Sheng (MS24049HJ) or equivalent.

4. Absolute Maximum Ratings

4.1 TFT LCD Module

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------------|--------|-----|-----|--------|-----------------|
| Logic/LCD Drive Voltage | VDD | 0 | 6.0 | [Volt] | Note 1,2 |

4.2 Backlight Unit

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------|--------|------|------|--------|-----------------|
| LED Input Voltage | Vcc | 10.8 | 13.2 | [Volt] | Note 1,2 |


4.3 Absolute Ratings of Environment

| Item | Symbol | Min. | Max. | Unit | Conditions |
|-----------------------|--------|------|------|-------|---------------|
| Operating Temperature | TOP | -20 | 70 | [°C] | Note 3 |
| Operation Humidity | HOP | 5 | 90 | [%RH] | |
| Storage Temperature | TST | -30 | 80 | [°C] | |
| Storage Humidity | HST | 5 | 90 | [%RH] | |

Note 1: With in Ta (25°C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: For quality performance, please refer to AUO IIS(Incoming Inspection Standard).

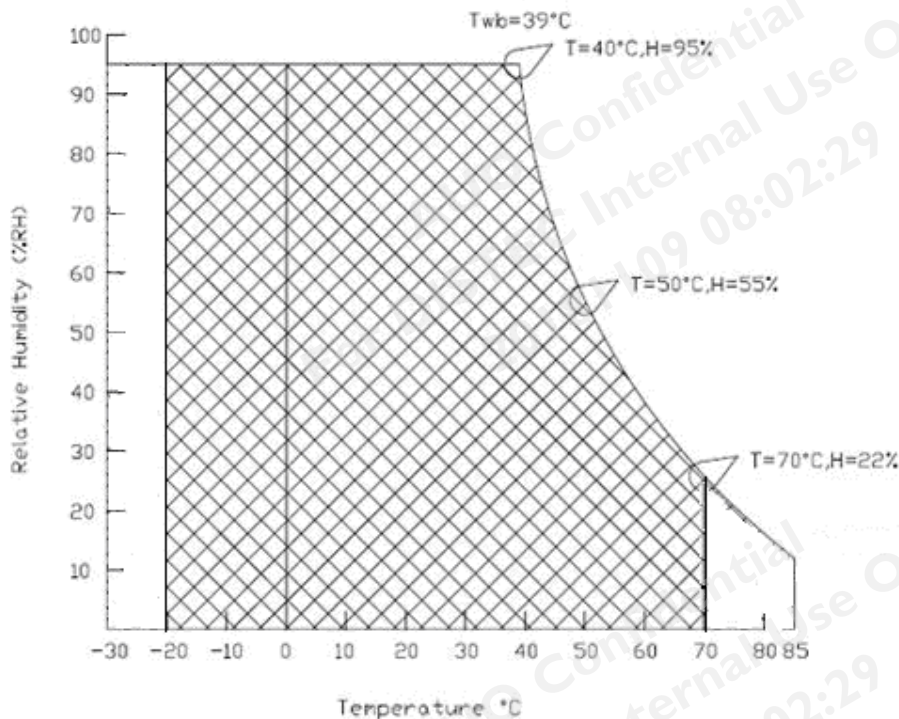



5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

| Symbol | Parameter | Min | Typ | Max | Units | Remark |
|--------|-------------------------|-----|-----|------|--------|---|
| VDD | Logic/LCD Drive Voltage | 4.5 | 5.0 | 5.5 | [Volt] | ± 10% |
| IDD | VDD Current | - | 900 | 1200 | [mA] | VDD= 5.0V, All White Pattern At 60Hz |
| Irush | LCD Inrush Current | - | - | 3 | [A] | Note 1 |
| PDD | VDD Power | - | 4.5 | 6 | [Watt] | VDD= 5.0V, All White Pattern At 60Hz |

Note 1: Measurement condition:

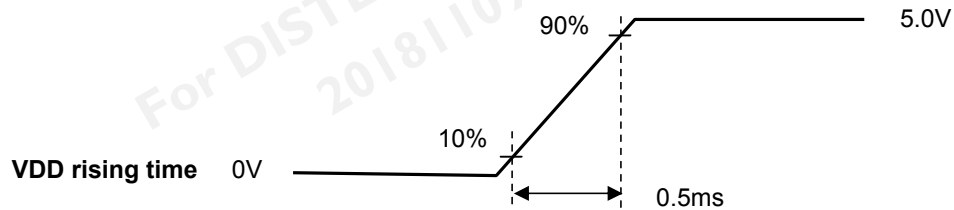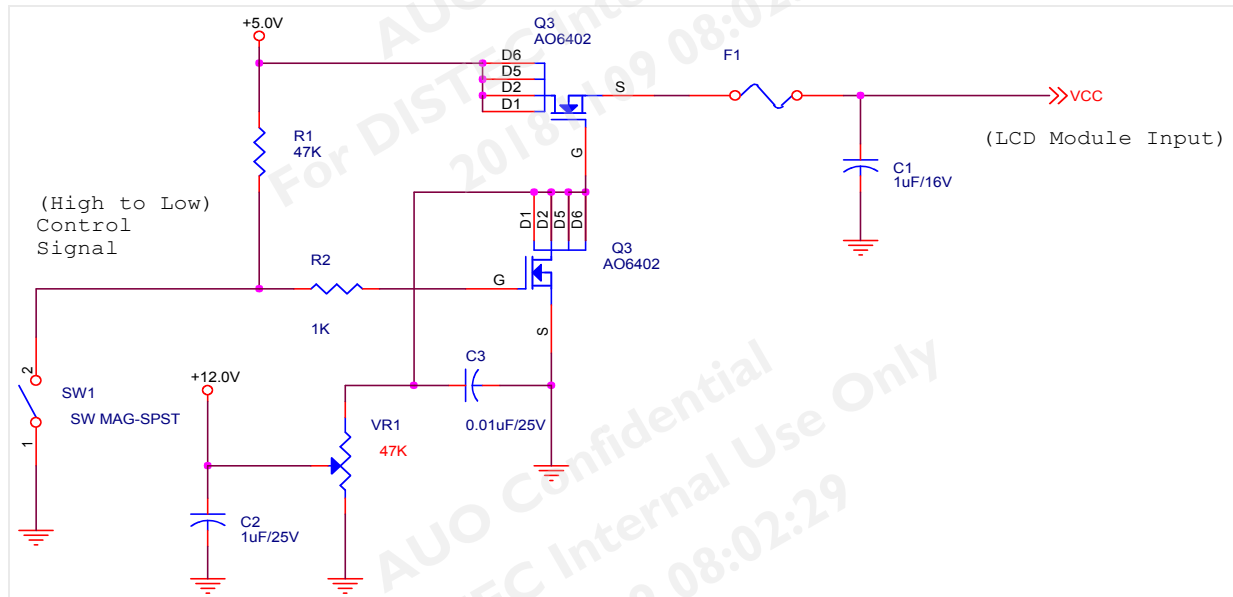


5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.

| Symbol | Item | Min. | Typ. | Max. | Unit | Remark |
|--------|--|------|------|------|------|----------------|
| VTH | Differential Input High Threshold | - | - | 100 | [mV] | VCM=1.2V |
| VTL | Differential Input Low Threshold | -100 | - | - | [mV] | VCM=1.2V |
| VID | Input Differential Voltage | 100 | 400 | 600 | [mV] | |
| VICM | Differential Input Common Mode Voltage | 0.3 | - | 1.25 | [V] | VTH/VTL=±100mV |

Note: LVDS Signal Waveform.

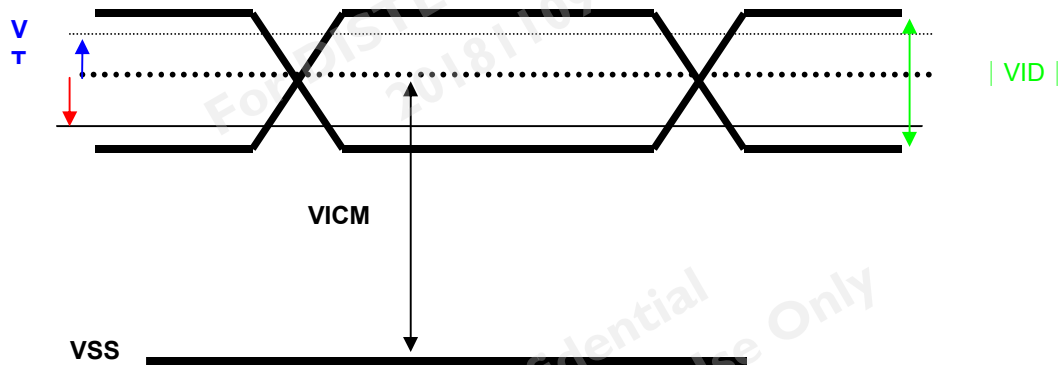

5.2 Backlight Unit

5.2.1 LED Driver

Following characteristics are measured under stable condition at 25°C (Room Temperature).

| Symbol | Parameter | Min | Typ | Max | Units | Remark |
|----------------|-----------------------|-------|-----|------|-------|---------------------|
| Vcc | Input Voltage | 10.8 | 12 | 13.2 | Volt | |
| Ivcc | Input Current | - | 2 | - | A | 100% Dimming |
| PLED | Power Consumption | | 24 | - | Watt | 100% Dimming, Note3 |
| Irush | Inrush Current | - | 4 | 5 | A | |
| BL_EN | On Control Voltage | 3 | - | 5.5 | Volt | |
| | Off Control Voltage | 0 | - | 0.5 | Volt | |
| FPWM | PWM Dimming Frequency | 200 | - | 20K | Hz | |
| | High Voltage | 3.0 | 3.3 | 5.5 | Volt | |
| | Low Voltage | 0 | - | 0.5 | Volt | |
| | Dimming Duty Cycle | 10 | - | 100 | % | |
| I _F | LED Forward Current | | 100 | | mA | Ta = 25°C |
| Operating Life | | 50000 | - | - | Hrs | Ta = 25°C |

Note 1: Ta means ambient temperature of TFT-LCD module,

Note 2: If module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.


Note 3: LED light bar structure: (7 strings x 10pcs / string =70pcs LED)

Note 4: Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

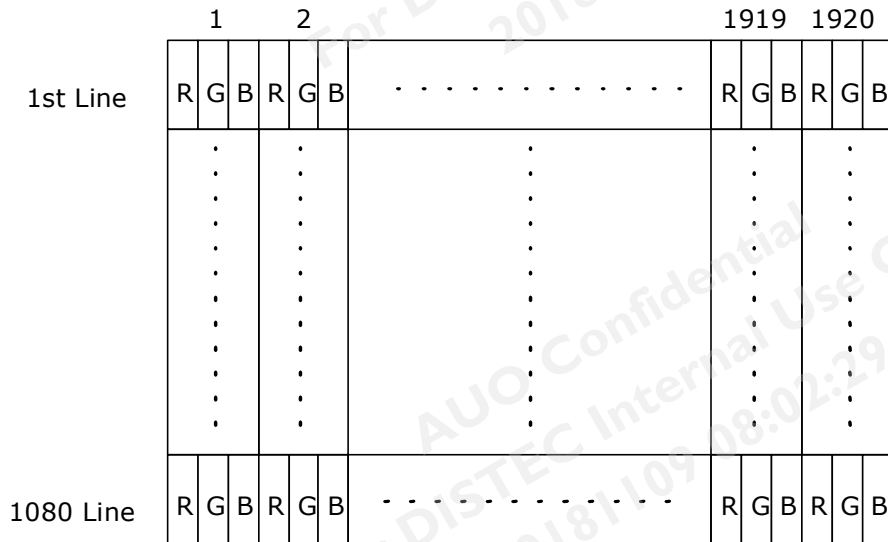


6.2 Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

| PIN # | SIGNAL NAME | DESCRIPTION |
|-------|-------------|--|
| 1 | RXinO0- | Negative LVDS differential data input (Odd data) |
| 2 | RXinO0+ | Positive LVDS differential data input (Odd data) |
| 3 | RXinO1- | Negative LVDS differential data input (Odd data) |
| 4 | RXinO1+ | Positive LVDS differential data input (Odd data) |
| 5 | RXinO2- | Negative LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG) |
| 6 | RXinO2+ | Positive LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG) |
| 7 | GND | Power Ground |
| 8 | RxOCLKIN- | Negative LVDS differential clock input (Odd clock) |
| 9 | RxOCLKIN+ | Positive LVDS differential clock input (Odd clock) |
| 10 | RXinO3- | Negative LVDS differential data input (Odd data) |
| 11 | RXinO3+ | Positive LVDS differential data input (Odd data) |
| 12 | RXinE0- | Negative LVDS differential data input (Even data) |
| 13 | RXinE0+ | Positive LVDS differential data input (Even data) |
| 14 | GND | Power Ground |
| 15 | RXinE1- | Negative LVDS differential data input (Even data) |
| 16 | RXinE1+ | Positive LVDS differential data input (Even data) |
| 17 | GND | Power Ground |
| 18 | RXinE2- | Negative LVDS differential data input (Even data) |
| 19 | RXinE2+ | Positive LVDS differential data input (Even data) |
| 20 | RxECLKIN- | Negative LVDS differential clock input (Even clock) |
| 21 | RxECLKIN+ | Positive LVDS differential clock input (Even clock) |
| 22 | RXinE3- | Negative LVDS differential data input (Even data) |
| 23 | RXinE3+ | Positive LVDS differential data input (Even data) |
| 24 | GND | Power Ground |
| 25 | NC | No contact (For AUO test only) |
| 26 | NC | No contact (For AUO test only) |
| 27 | VDD | Power +5V |
| 28 | VDD | Power +5V |
| 29 | VDD | Power +5V |
| 30 | VDD | Power +5V |

6.3 The Input Data Format

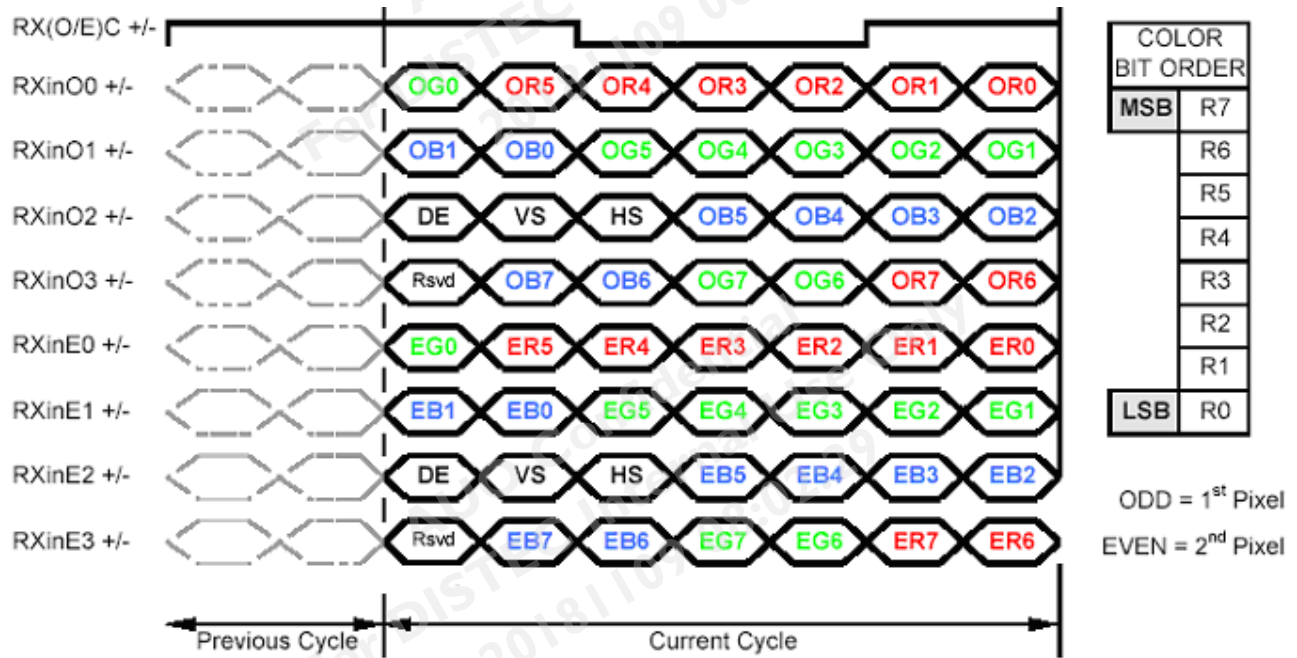

Note1: 8-bits signal input.

Note2: L:NS alike H:Thine alike


6.4 Interface Timing

6.4.1 Timing Characteristics

| Signal | Item | Symbol | Min | Typ | Max | Unit |
|--------------------|-----------|----------------------|------|------|------|---------|
| Clock | Frequency | $1/T_{\text{Clock}}$ | 40 | 72 | 83 | MHz |
| | Period | T_{Clock} | | | | |
| Frame Rate | Frequency | $1/T_V$ | 50 | 60 | 75 | Hz |
| | Period | T_V | 1088 | 1120 | 2047 | T_line |
| | Active | T_{VD} | 1080 | 1080 | 1080 | |
| Blanking | T_{VB} | 8 | 40 | 967 | | |
| Horizontal Section | Period | T_H | 1034 | 1060 | 2047 | T_clock |
| | Active | T_{HD} | 960 | 960 | 960 | |
| | Blanking | T_{HB} | 74 | 100 | 1087 | |


Note: DE mode only.

6.4.2 Input Timing Diagram

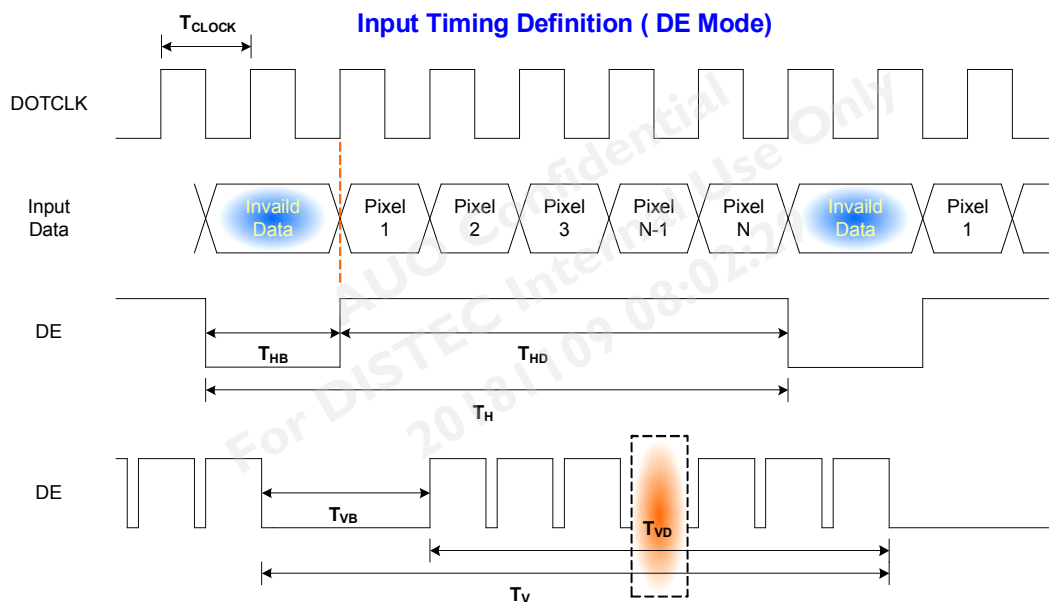

6.5 Power ON/OFF Sequence

VDD power and B/L on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

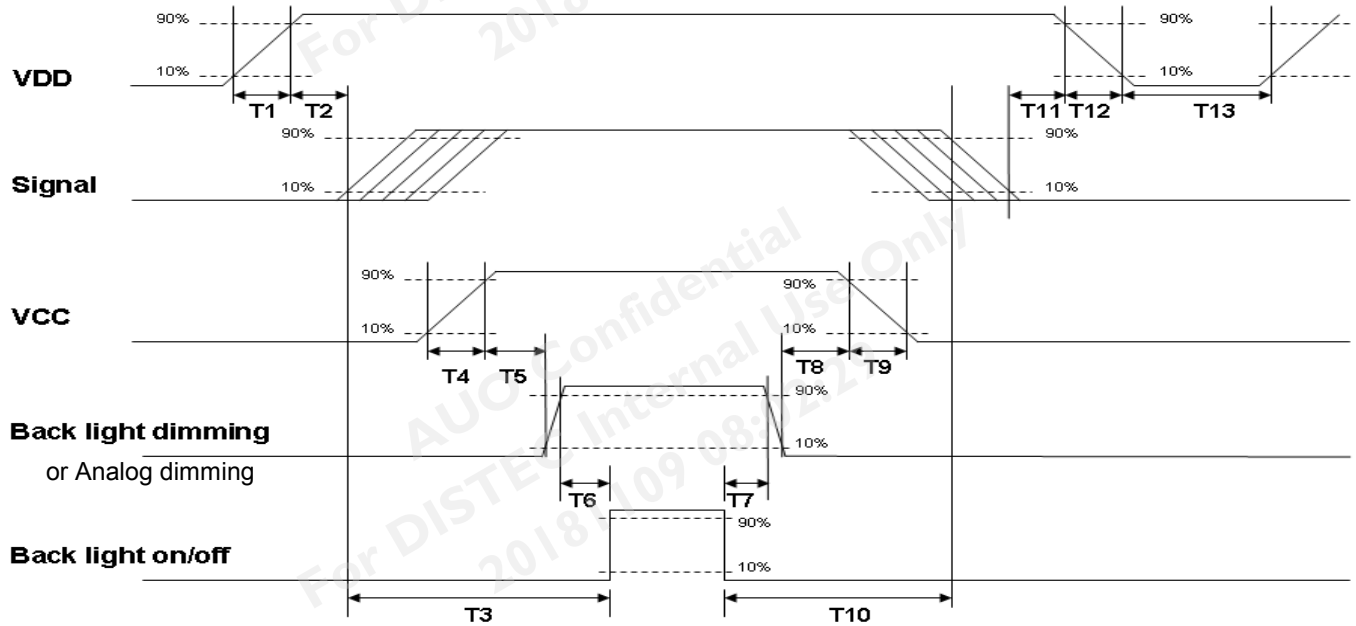

Power ON/OFF sequence timing

| Parameter | Value | | | Units |
|-----------|-------|------|------|-------|
| | Min. | Typ. | Max. | |
| T1 | 0.5 | -- | 10 | [ms] |
| T2 | 30 | 40 | 50 | [ms] |
| T3 | 200 | -- | -- | [ms] |
| T4 | 0.5 | -- | 10 | [ms] |
| T5 | 10 | -- | -- | [ms] |
| T6 | 10 | -- | -- | [ms] |
| T7 | 0 | -- | -- | [ms] |
| T8 | 10 | -- | -- | [ms] |
| T9 | -- | -- | 10 | [ms] |
| T10 | 110 | -- | -- | [ms] |
| T11 | 0 | 16 | 50 | [ms] |
| T12 | -- | -- | 10 | [ms] |
| T13 | 1000 | -- | -- | [ms] |

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.


7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module: LVDS Connector

| Connector Name / Designation | Interface Connector / Interface card |
|------------------------------|--------------------------------------|
| Manufacturer | JAE or compatible |
| Type Part Number | JAE (FI-XB30SRL-HF11) or equivalent. |
| Mating Housing Part Number | FI-X30HL (JAE) or compatible |


| Pin# | Signal Name | Pin# | Signal Name |
|------|-------------|------|-------------|
| 1 | RxOIN0- | 2 | RxOIN0+ |
| 3 | RxOIN1- | 4 | RxOIN1+ |
| 5 | RxOIN2- | 6 | RxOIN2+ |
| 7 | GND | 8 | RxOCLKIN- |
| 9 | RxOCLKIN+ | 10 | RxOIN3- |
| 11 | RxOIN3+ | 12 | RxEIN0- |
| 13 | RxEIN0+ | 14 | GND |
| 15 | RxEIN1- | 16 | RxEIN1+ |
| 17 | GND | 18 | RxEIN2- |
| 19 | RxEIN2+ | 20 | RxECLKIN- |
| 21 | RxECLKIN+ | 22 | RxEIN3- |
| 23 | RxEIN3+ | 24 | GND |
| 25 | NC | 26 | NC |
| 27 | VDD | 28 | VDD |
| 29 | VDD | 30 | VDD |

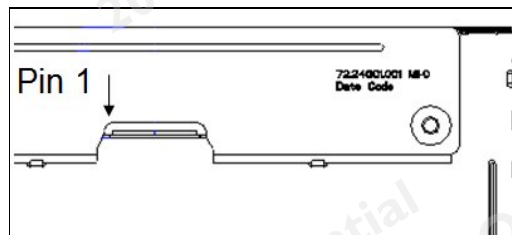

7.2 Backlight Unit: LED Connector

| | |
|-------------------------------------|-------------------------|
| Connector Name / Designation | LED Connector |
| Manufacturer | Sin Sheng or compatible |
| Connector Model Number | MS24049HJ |
| Mating Housing Part Number | P24049 or compatible |

| PIN # | SIGNAL NAME | DESCRIPTION |
|-------|-------------|-----------------------------|
| 1 | V12 | Input voltage, 12V |
| 2 | V12 | Input voltage, 12V |
| 3 | V12 | Input voltage, 12V |
| 4 | --- | NC |
| 5 | GND | Ground |
| 6 | GND | Ground |
| 7 | GND | Ground |
| 8 | BL_EN | Back light enable, 3~5.5 V |
| 9 | BL_DIM_P | Back light dimming, 3~5.5 V |

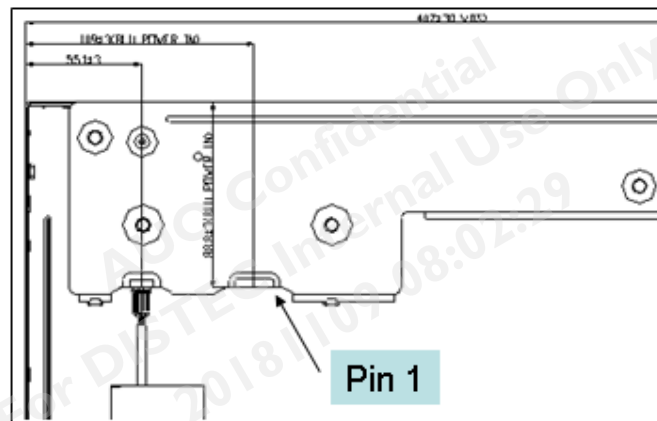

8. Reliability Test

Environment test conditions are listed as following table.

| Items | Required Condition | Note |
|-----------------------------------|---|----------|
| Temperature Humidity Bias (THB) | Ta= 50°C, 80%RH, 300hours | |
| High Temperature Operation (HTO) | Ta= 70°C, 50%RH, 300hours | |
| Low Temperature Operation (LTO) | Ta= -20°C, 300hours | |
| High Temperature Storage (HTS) | Ta= 80°C, 300hours | |
| Low Temperature Storage (LTS) | Ta= -30°C, 300hours | |
| Vibration Test (Non-operation) | Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Duration: 30 Minutes each Axis (X, Y, Z) | |
| Shock Test (Non-operation) | Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis) | |
| Drop Test | Height: 46 cm, package test | |
| Thermal Shock Test (TST) | -20°C/30min, 60°C/30min, 100 cycles | |
| On/Off Test | On/10sec, Off/10sec, 30,000 cycles | |
| ESD (Electro Static Discharge) | Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point. | 1 |
| | Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point. | |
| Altitude Test | Operation:10,000 ft Non-Operation:30,000 ft | |

Note 1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost
Self-recoverable. No hardware failures.

Note2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.


10. Label and Packaging

10.1 Shipping Label (on the rear side of TFT-LCD display)



10.2 Carton Package

- The outside dimension of carton is 413 x 282x 661 (mm).
- 8 pieces per carton box.
- 2*4 boxes per layer. By air, 2 layer / pallet. By sea, refer packing documents. Pallet size (not include carton boxes): 1150 mm * 840 mm * 132 mm

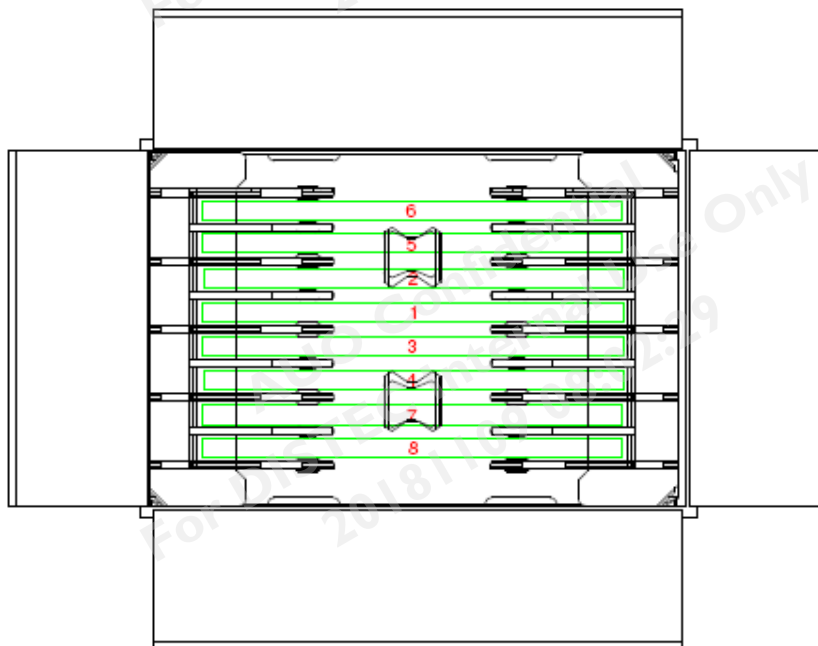



11. Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 1950, First Edition

U.S.A. Information Technology Equipment

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG

Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com