



CERTIFIED
for class A1

 **DISTEC**
A FORTEC GROUP MEMBER

BLO-LINE 42


FIRE LOAD AND
SMOKE OPTIMIZED

A1

Panel and housing

BLO-Line 42 monitor

Panel Diagonal	[mm] / [Inch]	1066.8/ 42
Type		BLO-Line monitor with glass and bezel
Resolution	[Pixel]	1920 x 1080 FHD
Luminance (center)	[cd/m ²]	700
Viewing angle	[°]	178 h / 178 v
Backlight		LED
Active area (H/V)	[mm]	930.24 x 523.26
Number of colors	[M]	16.7
Contrast ratio		4000:1
Resp. time (on/off)	[ms]	8
Pixel class		ISO 9241-307 (pixel error class II)
Life time back light	[h]	50.000
Continuous operation	[hh/d]	24/ 7
Mounting	[mm]	Wall mount included
Storage temperature	[°C] / [°F]	-20 ~ 60/ -4 ~ 140
Operating temperature	[°C] / [°F]	0 ~ 40/ 32 ~ 104
Storage humidity	[%]	10 ~ 90 (non condensing)
Operating humidity	[%]	10 ~ 90 (non condensing)
Panel orientation		Landscape and Portrait (option)
Location of connectors		Landscape and portrait mode: backside middle
Location of OSD buttons		Landscape and portrait mode: backside middle
Housing		Powder coated stainless steel, RAL 9005
Glass		Fire protection glass, 7 mm
Power supply	[V]	AC 110-240/ 50-60 Hz
Weight	[kg/ lb]	37/ 81.57
Dimension (W x H x D)	[mm/ inch]	998 x 591 x 74.5 39.29 x 23.27 x 2.93
Conformity		CE, FCC Class A, EU-RoHS A1 nach EN13501-1
Packaging		single packaging, max. 3 pcs. per pallet
Accessory kit		Safety instruction, Power cable DB-07-607 BLO certificate

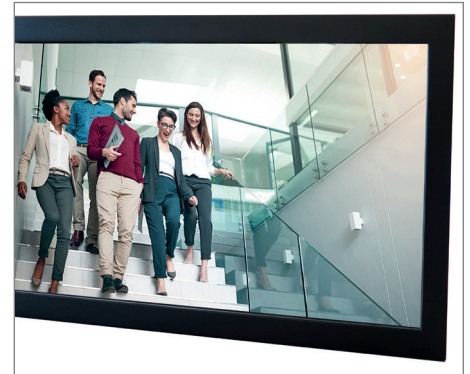

Distec is supporting member of Bundesverband Brandschutz-Fachbetriebe e.V.

Please also visit our website: www.brandschutzmonitore.de


Fördermitglied im




VGA, HDMI, DisplayPort

BLO-Line 42 Video PME

Order number		DS-92-059
Interfaces		1 x VGA, 1 x HDMI, 1 x DisplayPort, 1 x Audio Line-Out, 1 x USB-Remote
Power consump.(typ.)	[Watt]	100

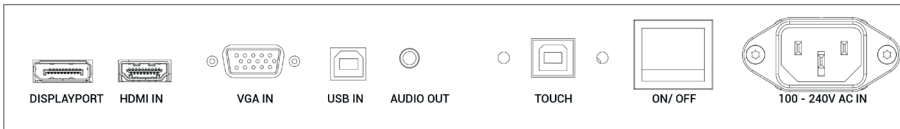


Raspberry® IoT controller



BLO-Line 42 IoT


Order number		DS-92-075
Order number OS		DS-60-859
Interfaces		1 x LAN, 2 x USB, 1 x HDMI, 1 x Line out, 1 x microSD card slot
Power consump. (typ.)	[Watt]	86

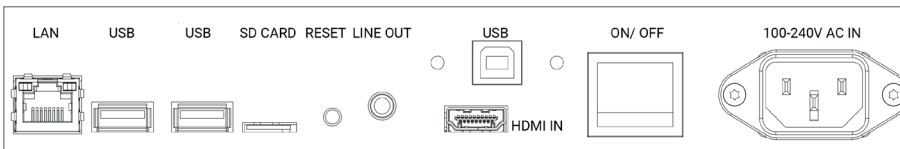

Network Mediaplayer

BLO-Line 42 VideoPoster

Order number		DS-92-124
Interfaces		1 x LAN, 2 x USB, 1 x HDMI in, 1 x Line out, 1 x microSD card slot
Power consumption (typ.)	[Watt]	86

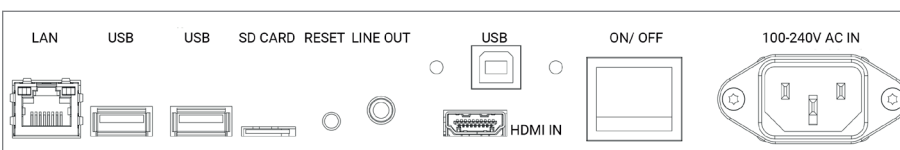


PC Intel Atom



BLO-Line 42 IQ Atom

Order number		DS-92-053
Interfaces		2 x Gigabit LAN, 1 x USB 3.0, 1 x USB 2.0, 1 x HDMI, 1 x VGA, 1 x RS232/422/485, 1 x RS232 (optional)
PC		CPU: Intel® Atom E3845 (1.9 GHz), RAM: 4 GB DDR3L, Storage: min. 128 GB mSATA
Fan		no
Power consump. (typ.)	[Watt]	101

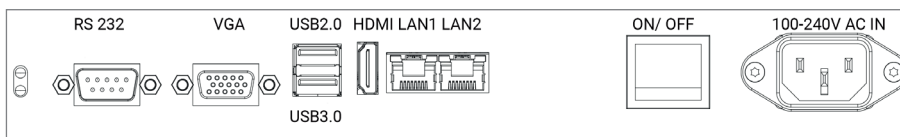

Touch

Options

Order numbers	DS-92-132	Touch monitor with Prisma Media Eco
	DS-92-154	Touch monitor with IQ Atom®
	DS-92-155	Touch monitor with Raspberry® IoT
Name		PCAP touch
Glass		Fire protection glass. 6.5 mm
Touch points		10
Touch technology		Projected capacitive
Can be combined with		–
Packaging	DS-92-132	USB cable Typ A - Typ B

Mechanics

Order number	DS-92-079	AP-01-148
Name	Extinguishing cartridge	BLO-Line A1, portrait mode
Description	Higher safety in cases of fire	Information order number if the usage will be in portrait mode.
Available for	all versions	

Mounting

Accessories

Order number	DS-92-108
Name	Cable feedthrough, option for BLO 42"
Description	Outlet for cable feed, to cover the cable connections

Operating systems, Software

Product	Order no.	Product description
WIN 10 IOT	DS-60-899	Embedded operation system 2019 LTSC
Windows 10 Pro. 64 bit DE	DS-60-811	Operation system
Windows 10 Pro. 64 bit EN	DS-60-810	Operation system
WEBPOSTER	DS-60-787	WEBPOSTER embedded Linux



All figures are typical values. The real values of the panel may vary. The optical characteristics are determined after the panel has been „ON“ for approximately 30 minutes at an ambient temperature of 25° C (77° F).

Life time of the backlight is defined as the time to take until the brightness reduces to 50% of its original value.

Copyright 2021 Distec GmbH. Information in the document is subject to change without prior notice.



Contact

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA.
For more information please contact:

HEADQUARTER - GERMANY

FORTEC FORTEC Elektronik AG
ELEKTRONIK AG
Augsburger Str. 2b
82110 Germering

Phone +49 89 894363-0
E-Mail sales@FORTECag.de
Internet www.FORTECag.de

Designed,
developed and
made in Germany

FORTEC GROUP MEMBERS

GERMANY



Distec GmbH
Augsburger Str. 2b
82110 Germering

Phone +49 369207162-0
E-Mail solution@distec.de
Internet www.distec.de

AUSTRIA



Distec GmbH
Office Vienna
Nuschinggasse 12
1230 Wien

Phone +43 1 8 67 34 92-0
E-Mail info@distec.de
Internet www.distec.de

SWITZERLAND



ALTRAC AG
Bahnhofstraße 3
5436 Würenlos

Phone +41 44 7 44 61 11
E-Mail info@altrac.ch
Internet www.altrac.ch

UNITED KINGDOM



Display Technology Ltd.
Osprey House, 1 Sprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire
PE29 6FN

Phone +44 14 80 41 16 00
E-Mail info@displaytechnology.co.uk
Internet www.displaytechnology.co.uk

USA



Apollo
Display Technologies, Corp.
87 Raynor Avenue,
Unit 1, Ronkonkoma
NY 11779

Phone +1 6 31 5 80 43 60
E-Mail info@apollodisplays.com
Internet www.apollodisplays.com