

OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

Distec

IoT-CP-AM-1280800P3TZQW-10H-00

7.0" IoT Compact Panel with 800cd/m² brightness

DI-06-012

Version 1.2

05.07.2019

Table of Contents

1	Revision History	4
2	Description	4
3	Characteristics.....	5
3.1	Further Specifications.....	5
3.1.1	TFT-Display	5
3.1.2	TFT Controller	5
4	Mechanical Drawing	6
5	Optional Accessories	7
6	Software for the IoT Compact Panels	7
6.1	Operating systems.....	7
6.1.1	Raspbian O/S.....	7
6.1.2	Emteria O/S.....	7
6.2	Application Software	8
6.2.1	Info Beamer	8
6.2.2	VideoPoster-IV	8

1 Revision History

Date	Rev.No.	Description	Page
18.06.2018	1.0	Initial release	All
08.03.2019	1.1	Coverpage added, Links updated	All
05.07.2019	1.2	Corrected brightness from 1.000 to 800 cd/m ² Updated last page	2, 4-5 9

2 Description

Distec's IoT Compact Panel is an open frame design TFT display solution, featuring the Raspberry Pi based TFT controller Artista-IoT. Therefore it is the perfect platform for Industry 4.0 and Internet of Things projects. Its modular based construction allows an easy integration into customer's applications.

Artista-IoT offers all advantages of a modern ARM processor platform: driven by single 12V power supply and offering LAN, HDMI-IN, 2xUSB, Line Out and microSD as front interfaces. Furthermore it offers USB, LVDS, I²C, UART and an internal power connector for i.e. DC/DC converters inside the housing. Wireless LAN or Bluetooth adapters can be connected as well via USB. As optional devices IR remote, OSD keypad and light sensor are available.

Users are able to program their own applications on a Raspberry Pi basis, supported by the large community. Standard applications such as VideoPoster are also available as an option. Moreover all operating systems supported by the Raspberry Pi community can be used as well.

Our 7.0" IoT-CP-AM-1280800P3TZQW-10H-00 IoT Compact Panel with an industrial high-quality display and a very high brightness of 800cd/m² is designed for long term availability. The integrated passive cooling allows for operating the system under full load even at high ambient temperatures.

IoT-CP-AM-1280800P3TZQW-10H-00's versatility allows for usage in various applications such as gaming, amusement, industry and stand-alone GUI (Graphic User Interface).

3 Characteristics

Items	Unit	Specification
Type	Ampire LCD TFT	AM-1280800P3TZQW-10H
Screen Diagonal	[inch]	7,0
Physical Size H x V x D	[mm]	162.2 x 107.8 x 43.6
Active Area H x V	[mm]	149,76 x 93,60
Pixels H x V		1280(RGB)x800
Supported Colors		262k/16.7M
Brightness	[cd/m ²]	800
Viewing Angle	v/h	160°/160°
Nominal Input Voltage	[V]	12 typ.
Typical Power Consumption	[W]	10 typ.
Weight	[kg]	0,603
Electrical Interface		100Mbit Ethernet, USB, GPIO, I ² C, UART, HDMI, 12V power, micro SD, Audio Line Out, GPIO
Storage Temperature	[°C]	-30 to +80
Operating Temperature Range	[°C]	-20 to +70

3.1 Further Specifications

3.1.1 TFT-Display

[AM-1280800P3TZQW-10H Datasheet](#) 


3.1.2 TFT Controller



[Distec Artista-Media III Datasheet](#) 

[Raspberry Pi Compute Module 3 \(CM3\) Datasheet](#) 

4 Mechanical Drawing

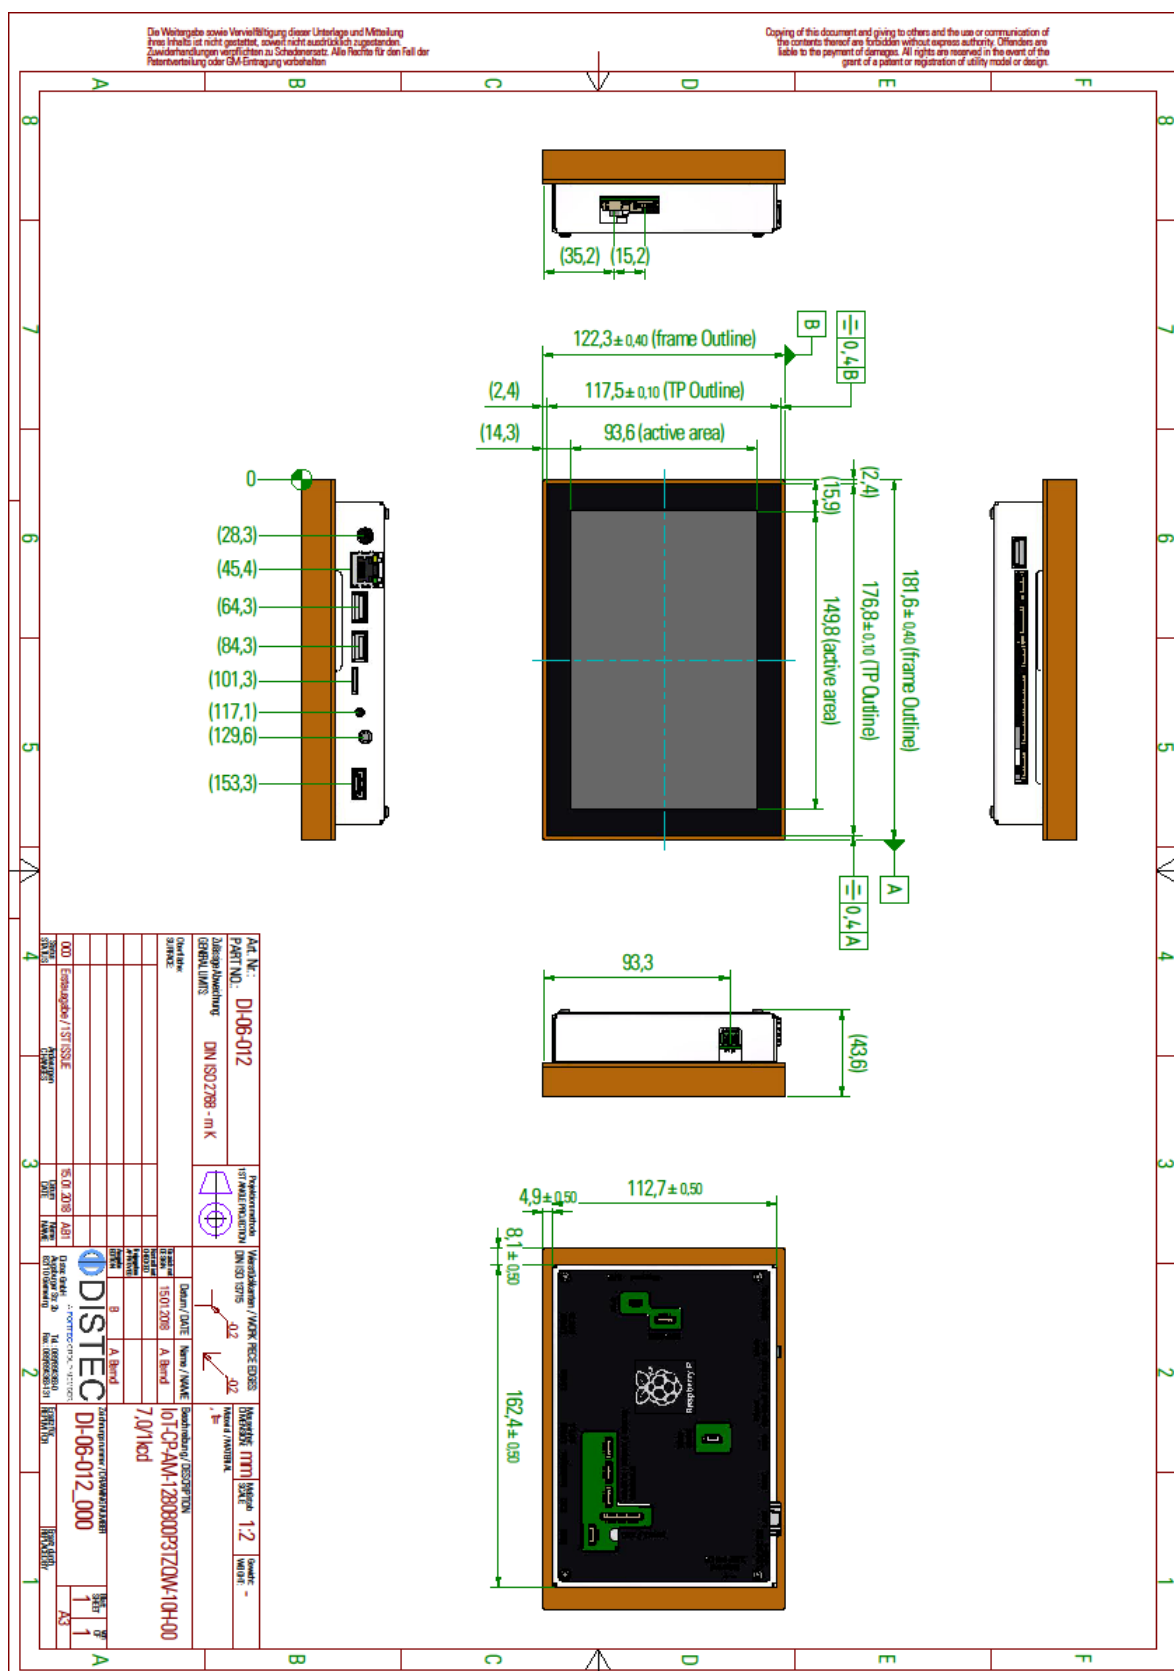

5 Optional Accessories

We offer various accessories for the Artista-IoT e.g. cables, sensors, remote control etc. Please refer to the following pdf for the latest accessories overview:

[Artista-IoT Accessories](#) 

6 Software for the IoT Compact Panels

There is a wide range of software available for the IoT Compact Panels. Please click on the logos to visit the websites for more information:



Artista-IoT



Software



Infinite possibilities

6.1 Operating systems

6.1.1 Raspbian O/S



Raspbian is a free operating system based on Debian optimized for the Raspberry Pi hardware.

6.1.2 Emteria O/S



Emteria is an O/S based on industrial Android 7.x, providing a simplified development process.

6.2 Application Software

6.2.1 Info Beamer



Info Beamer is capable of displaying any kind of information since it is fully programmable e.g. for synchronized content and full HD video playback.

6.2.2 VideoPoster-IV



VideoPoster is a full HD capable network player. MPEG media files are played from an SD card. Videos are transferred via USB or Ethernet.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC Elektronik AG

Office Vienna

Nuschingasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de



FORTEC Elektronik AG

Lechwiesenstraße 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com